

BIOMATERIALS MODIFIED WITH SUPEROXIDE DISMUTASE MIMICS**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority from provisional application number 60/136,298 filed May 27, 1999, which
5 is hereby incorporated by reference in its entirety for all purposes.

BACKGROUND OF THE INVENTION

The present invention relates to biomaterials modified with non-proteinaceous catalysts for the
10 dismutation of superoxide, and processes for making such materials. This modification may be by covalent conjugation, copolymerization, or admixture of the non-proteinaceous catalysts with the biomaterial. The resulting modified biomaterials exhibit a marked decrease
15 in inflammatory response and subsequent degradation when placed in contact with vertebrate biological systems.

"Biomaterial" is a term given to a wide variety of materials which are generally considered appropriate for use in biological systems, including metals, polymers,
20 biopolymers, and ceramics. Also included in the term are composites of such materials, such as the polymer-hydroxyapatite composite disclosed in U.S. Pat. No. 5,626,863. Biomaterials are used in a variety of medical and scientific applications where a man-made implement
25 comes into contact with living tissue. Heart valves, stents, replacement joints, screws, pacemaker leads, blood vessel grafts, sutures and other implanted devices constitute one major use of biomaterials. Machines which handle bodily fluids for return to the patient, such as

heart/lung and hemodialysis machines, are another significant use for biomaterials.

Common metal alloy biomaterials used for implants include titanium alloys, cobalt-chromium-molybdenum alloys, cobalt-chromium-tungsten-nickel alloys and non-magnetic stainless steels (300 series stainless steel). See U.S. Pat. No. 4,775,426. Titanium alloys are frequently used for implants because they have excellent corrosion resistance. However, they have inferior wear characteristics when compared with either cobalt-chromium-molybdenum alloys or 300 series stainless steel. Cobalt-chromium-molybdenum alloys have about the same tensile strength as the titanium alloys, but are generally less corrosion resistant. They also have the further disadvantage of being difficult to work. In contrast, the 300 series stainless steels were developed to provide high-strength properties while maintaining workability. These steels are, however, even less resistant to corrosion and hence more susceptible to corrosion fatigue. See U.S. Pat. No. 4,718,908. Additional examples of biocompatible metals and alloys include tantalum, gold, platinum, iridium, silver, molybdenum, tungsten, inconel and nitinol. Because certain types of implants (artificial joints, artificial bones or artificial tooth roots) require high strength, metallic biomaterials have conventionally been used. However, as mentioned above, certain alloys corrode within the body and, as a result, dissolved metallic ions can produce adverse effects on the surrounding cells and can result in implant breakage.

In an attempt to solve this problem, ceramic biomaterials such as alumina have been used in high-stress applications such as in artificial knee joints. Ceramic biomaterials have an excellent affinity for bone

09560007-032600

tissue and generally do not corrode in the body. But when used under the load of walking or the like, they may not remain fixed to the bone. In many cases additional surgery is required to secure the loosened implant. This

5 shortcoming led to the development of bioactive ceramic materials. Bioactive ceramics such as hydroxyapatite and tricalcium phosphate are composed of calcium and phosphate ions (the main constituents of bone) and are readily resorbed by bone tissue to become chemically

10 united with the bone. U.S. Pat. No. 5,397,362. However, bioactive ceramics such as hydroxyapatite and tricalcium phosphate are relatively brittle and can fail under the loads in the human body. This has led in turn to the development of non-calcium phosphate bioactive ceramics

15 with high strength. See U.S. Pat. No. 5,711,763. Additional examples of biocompatible ceramics include zirconia, silica, calcia, magnesia, and titania series materials, as well as the carbide series materials and the nitride series materials.

20 Polymeric biomaterials are desirable for implants because of their chemical inertness and low friction properties. However, polymers used in orthopedic devices such as hip and knee joints have a tendency for wear and build-up of fine debris, resulting in a painful

25 inflammatory response. Examples of biocompatible polymeric materials include silicone, polyurethane, polyureaurethane, polyethylene teraphthalate, ultra high molecular weight polyethylene, polypropylene, polyester, polyamide, polycarbonate, polyorthoesters,

30 polyesteramides, polysiloxane, polyolefin, polytetrafluoroethylene, polysulfones, polyanhydrides, polyalkylene oxide, polyvinyl halide, polyvinylidene halide, acrylic, methacrylic, polyacrylonitrile, vinyl, polyphosphazene, polyethylene-co-acrylic acid, hydrogels

09560007 03EE00

and copolymers. Specific applications include the use of polyethylene in hip and knee joint implants and the use of hydrogels in ocular implants. See U.S. Pat. No. 5,836,313. In addition to relatively inert polymeric materials discussed above, certain medical applications require the use of biodegradable polymers for use as sutures and pins for fracture fixation. These materials serve as a temporary scaffold which is replaced by host tissue as they are degraded. See U.S. Pat. No. 5,766,618. Examples of such biodegradable polymers include polylactic acid, polyglycolic acid, and polyparadioxanone.

In addition to wholly synthetic polymers, polymers which are naturally produced by organisms have been used in several medical applications. Such polymers, including polysaccharides such as chitin, cellulose and hyaluronic acid, and proteins such as fibroin, keratin, and collagen, offer unique physical properties in the biological environment, and are also useful when a biodegradable polymer is required. In order to adapt these polymers for certain uses, many have been chemically modified, such as chitosan and methyl cellulose. These polymers have found niches in a variety of applications. Chitosan is often used to cast semi-permeable films, such as the dialysis membranes in U.S. Pat. No. 5,885,609. Fibroin (silk protein) has been used as a support member in tissue adhesive compositions, U.S. Pat. No. 5,817,303. Also, esters of hyaluronic acid have been used to create bioabsorbable scaffolding for the regrowth of nerve tissue, U.S. Pat. No. 5,879,359.

As is evident from the preceding paragraphs, individual biomaterials have both desirable and undesirable characteristics. Thus, it is common to create medical devices which are composites of various

biocompatible materials in order to overcome these deficiencies. Examples of such composite materials include: the implant material comprising glass fiber and polymer material disclosed in U.S. Pat. No. 5,013,323; 5 the polymeric-hydroxyapatite bone composite disclosed in U.S. Pat. No. 5,766,618; the implant comprising a ceramic substrate, a thin layer of glass on the substrate and a layer of calcium phosphate over the glass disclosed in U.S. Pat. No. 5,397,362; and an implant material 10 comprising carbon fibers in a matrix of fused polymeric microparticles. The diverse uses of biomaterials require a range of mechanical and physical properties for particular applications. As medical science advances, many applications will require new and diverse materials 15 which can be safely and effectively used in biological systems.

Biomaterials, especially polymers, have been chemically modified in several ways in order to give them certain biological characteristics. For instance, thrombogenesis has posed a perennial problem for the use of biomaterials in hemodialysis membranes. In order to decrease thrombogenesis, hemodialysis fluid circuit materials have been modified by ionic complexation and interpenetration of heparin, U.S. Pat. No. 5,885,609, and by graft copolymer techniques in which heparin is linked to the backbone polymer by polyethylene oxide, Park, K.D., "Synthesis and Characterization of SPUU-PEO-Heparain Graft Copolymers", J. Polymer. Sci., Vol. 20, p. 1725-37 (1991). Similarly, polymers containing incorporated drugs for elution into the body have been co-implanted with stents in order to prevent restenosis, U.S. Pat. No. 5,871,535.


Although most biomaterials in current use are considered non-toxic, implanted biomaterial devices are

seen as foreign bodies by the immune system, and so elicit a well characterized inflammatory response. See Gristina, A.G. "Implant Failure and the Immuno-Incompetent Fibro-Inflammatory Zone" In "Clinical Orthopaedics and Related Research" (1994), No. 298, pp. 106-118. This response is evidenced by the increased activity of macrophages, granulocytes, and neutrophils, which attempt to remove the foreign object by the secretion of degradative enzymes and free radicals like superoxide ion (O_2^-) to inactivate or decompose the foreign object. Woven dacron polyester, polyurethane, velcro, polyethylene, and polystyrene were shown to elicit superoxide production from neutrophils by Kaplan, S.S., et al, "Biomaterial-induced alterations of neutrophil superoxide production" In "Jour.Bio.Mat.Res." (1992), Vol. 26, pp. 1039-1051. To a lesser extent, polysulfone/carbon fiber and polyetherketoneketone/carbon fiber composites were shown to elicit a superoxide response by Moore, R., et al, "A comparison of the inflammatory potential of particulates derived from two composite materials" In "Jour.Bio.Mat.Res." (1997), Vol. 34, pp. 137-147. Hydroxyapatite, tricalcium phosphate, and aluminum-calcium-phosphorous oxide bioceramics were shown to be degraded by macrophages by Ross, L., et al, "The Effect of HA, TCP and Alcap Bioceramic Capsules on the Viability of Human Monocyte and Monocyte Derived Macrophages" in "Bio.Sci.Inst." (1996), Vol. 32, pp. 71-79. Similarly, cobalt-chrome alloy beads were degraded by neutrophils in a study by Shanbhag, A., et al, "Decreased neutrophil respiratory burst on exposure to cobalt-chrome alloy and polystyrene in vitro" In "Jour.Bio.Mat.Res." (1992), Vol. 26, 2, pp. 185-195. Even biomaterials which have been modified to present biologically acceptable molecules, such as heparin, have

5 Cardiovasc. Surgeon 45 (1997) 295-301. In addition,
chemical modification has posed several difficulties.
Because of the unique chemical characteristics of each
biomaterial and bioactive molecule, covalent linkage of
the desired bioactive molecule to the biomaterial is not
10 always possible. In addition, the activity of many
bioactive molecules, especially proteins, is diminished
or extinguished when anchored to a solid substrate.
Finally, the fact that many biologically active
substances are heat liable has prevented their use with
15 biomaterials that are molded or worked at high
temperatures.

The impact of continual attempts by the organism to degrade biomaterial implants can lead to increased morbidity and device failure. In the case of polyurethane pacemaker lead wire coatings, this results in polymer degradation and steady loss of function. In the use of synthetic vascular grafts, this results in persistent thrombosis, improper healing, and restenosis. As mentioned above, orthopedic devices such as hip and knee joints have a tendency for wear and build-up of fine debris resulting in a painful inflammatory response. In addition, the surrounding tissue does not properly heal and integrate into the prosthetic device, leading to device loosening and opportunistic bacterial infections. It has been proposed by many researchers that chronic inflammation at the site of implantation leads to the exhaustion of the macrophages and neutrophils, and an inability to fight off infection.

Superoxide anions are normally removed in biological systems by the formation of hydrogen peroxide and oxygen in the following reaction (hereinafter referred to as dismutation):



This reaction is catalyzed in vivo by the ubiquitous superoxide dismutase enzyme. Several non-proteinaceous catalysts which mimic this superoxide dismutating activity have been discovered. A particularly effective family of non-proteinaceous catalysts for the dismutation of superoxide consists of the manganese(II), manganese(III), iron(II) or iron(III) complexes of nitrogen-containing fifteen-membered macrocyclic ligands which catalyze the conversion of superoxide into oxygen and hydrogen peroxide, described in U.S. Patents Nos. 5,874,421 and 5,637,578, all of which are incorporated herein by reference. See also Weiss, R.H., et al, "Manganese(II)-Based Superoxide Dismutase Mimetics: Rational Drug Design of Artificial Enzymes", (1996) Drugs of the Future 21, 383-389; and Riley, D.P., et al, "Rational Design of Synthetic Enzymes and Their Potential Utility as Human Pharmaceuticals" (1997) in CatTech, I, 41. These mimics of superoxide dismutase have been shown to have a variety of therapeutic effects, including anti-inflammatory activity. See Weiss, R.H., et al, "Therapeutic Aspects of Manganese (II)-Based Superoxide Dismutase Mimics" In "Inorganic Chemistry in Medicine", (Farrell, N., Ed.), Royal Society of Chemistry, in Press; Weiss, R.H., et al, "Manganese-Based Superoxide Dismutase Mimics: Design, Discovery and Pharmacologic Efficacies" (1995) In "The Oxygen Paradox (Davies, K.J.A., and Ursini, F., Eds.) pp. 641-651, CLEUP University Press, Padova, Italy; Weiss, R.H., et al, "Manganese-Based Superoxide Dismutase

00560007-052600

Mimetic Inhibit Neutrophil Infiltration In Vitro",
J.Biol.Chem., 271, 26149 (1996); and Hardy, M.M., et al,
"Superoxide Dismutase Mimetics Inhibit Neutrophil-
Mediated Human Aortic Endothelial Cell Injury In Vitro",
5 (1994) J.Biol.Chem. 269, 18535-18540. Other non-
proteinaceous catalysts which have been shown to have
superoxide dismutating activity are the salen-transition
metal cation complexes, described in U.S. Patent No.
5,696,109, and complexes of porphyrins with iron and
10 manganese cations.

SUMMARY OF THE INVENTION

Applicants have discovered that the modification of
biomaterials with non-proteinaceous catalysts for the
dismutation of superoxide greatly improves the
15 biomaterial's resistance to degradation and reduces the
inflammatory response. Thus, the present invention is
directed to biomaterials which have been modified with
non-proteinaceous catalysts for the dismutation of
superoxide, or precursor ligands of non-proteinaceous
20 catalysts for the dismutation of superoxide.

The present invention is directed to biomaterials
which have been modified with non-proteinaceous catalysts
for the dismutation of superoxide, or precursor ligands
of a non-proteinaceous catalyst for the dismutation of
25 superoxide, by utilizing methods of physical association,
such as surface covalent conjugation, copolymerization,
and physical admixing. The present invention is also
directed to biomaterials modified with non-proteinaceous
catalysts for the dismutation of superoxide wherein one
30 or more of these methods has been used to modify the
biomaterial.

A variety of biomaterials are appropriate for
modification in the present invention. Because the non-

005500007 "05E600

proteinaceous catalysts for the dismutation of superoxide are suitable for use in a range of methods for physically associating the catalyst with the biomaterial, almost any biomaterial may be modified according to the present invention. The biomaterial to be modified may be any biologically compatible metal, ceramic, polymer, biopolymer, biologically derived material, or a composite thereof. Thus, the present invention is further directed towards any of the above biomaterials modified with non-proteinaceous catalysts for the dismutation of superoxide.

As previously mentioned, the non-proteinaceous catalysts for the dismutation of superoxide for use in the present invention comprise an organic ligand and a transition metal cation. Particularly preferred catalysts are manganese and iron chelates of pentaazacyclopentadecane compounds (hereinafter referred to as "PACPeD catalysts"). Also suitable for use in the present invention are the salen complexes of manganese and iron disclosed in U.S. Patent No. 5,696,109, and iron or manganese porphyrins, such as Mn^{III} tetrakis(4-N-methylpyridyl)porphyrin, Mn^{III} tetrakis-o-(4-N-methylisonicotinamidophenyl)porphyrin, Mn^{III} tetrakis(4-N-N-N-trimethylanilinium)porphyrin, Mn^{III} tetrakis(1-methyl-4-pyridyl)porphyrin, Mn^{III} tetrakis(4-benzoic acid)porphyrin, Mn^{II} octabromo-meso-tetrakis(N-methylpyridinium-4-yl)porphyrin, Fe^{III} tetrakis(4-N-methylpyridyl)porphyrin, and Fe^{III} tetrakis-o-(4-N-methylisonicotinamidophenyl)porphyrin. These non-proteinaceous catalysts for the dismutation of superoxide also preferably contain a reactive moiety when the methods of surface covalent conjugation or copolymerization are used to modify the biomaterial. Thus, the present invention is directed to biomaterials

00560007-052500

which have been modified with any of the above non-proteinaceous catalysts for the dismutation of superoxide. In addition, as sometimes it is advantageous to add the chelated transition metal ion after the biomaterial has been modified, the present invention is also directed to biomaterials which have been modified with the precursor ligand of any of the above non-proteinaceous catalysts.

The present invention is also directed to processes for producing biomaterials modified by surface covalent conjugation with at least one non-proteinaceous catalyst for the dismutation of superoxide or at least one precursor ligand of a non-proteinaceous catalyst for the dismutation of superoxide, the process comprising:

- a. providing at least one reactive functional group on a surface of the biomaterial to be modified;
- b. providing at least one complementary reactive functional group on the non-proteinaceous catalyst for the dismutation of superoxide or on the precursor ligand; and
- c. conjugating the non-proteinaceous catalyst for the dismutation of superoxide or the precursor ligand with the surface of the biomaterial through at least one covalent bond.

The non-proteinaceous catalyst for the dismutation of superoxide or the precursor ligand can be covalently bound directly to the surface of the biomaterial, or bound to the surface through a linker molecule. Thus, the present invention is also directed to the above process further comprising providing a bi-functional linker molecule.

The present invention is also directed to a process for producing a biomaterial modified by co-polymerization

00560007.03E600

[illegible]

- The present invention is also directed to a process for producing a biomaterial modified by admixture with at least one non-proteinaceous catalyst for the dismutation of superoxide or a precursor ligand of a non-proteinaceous catalyst for the dismutation of superoxide, the process comprising:

- the process comprising:
- 25 a. providing at least one unmodified biomaterial;
- b. providing at least one non-proteinaceous
 catalyst for the dismutation of superoxide or
 at least one ligand precursor of a non-
 proteinaceous catalyst for the dismutation of
30 superoxide; and
- c. admixing the unmodified biomaterial and the
 non-proteinaceous catalyst for the dismutation
 of superoxide or the ligand precursor.

[illegible][illegible][illegible][illegible]

000000000000000000000000

00000000000000000000000000000000

BIBLIOGRAPHY

00000000000000000000000000000000

not been admixed with a non-proteinaceous catalyst for the dismutation of superoxide; B) a fiber made of polypropylene which has been admixed with Compound 54, 2% by weight.

5 FIGURE 5: A comparison of capsules formed around disks of polyethylene which have been implanted in a rat for 3 days. A) control disk, not conjugated with a non-proteinaceous catalyst; B) a disk conjugated with
10 Compound 43, 0.06% by weight; C) a disc conjugated with Compound 43, 1.1% by weight.

15 FIGURE 6: A comparison of capsules formed around disks of polyethylene which have been implanted in a rat for 28 days. A) control disk, not conjugated with a non-proteinaceous catalyst; B) a disk conjugated with
15 Compound 43, 0.06% by weight; C) a disc conjugated with Compound 43, 1.1% by weight.

20 FIGURE 7: A graphical comparison of the capsule thickness and number of giant cells in the capsule for polyethylene disks conjugated with Compound 43, 0.06% by weight, and polyethylene disks conjugated with Compound 43, 1.1% by weight, after implantation for 28 days.

25 FIGURE 8: A comparison of capsules formed around disks of poly(etherurethane urea) which have been implanted in a rat for 28 days. A) control disk, not
25 conjugated with a non-proteinaceous catalyst; B) a disk conjugated with Compound 43, 0.6% by weight; C) a disc conjugated with Compound 43, 3.0% by weight.

30 FIGURE 9: A comparison of capsules formed around disks of tantalum which have been implanted in a rat for 3 days. A) control disk, conjugated only with the silyl linker; B) a disk conjugated with Compound 43 via the silyl linker.

FIGURE 10: A comparison of capsules formed around disks of tantalum which have been implanted in a rat for

00550007-052500

28 days. A) control disk, conjugated only with the silyl linker; B) a disk conjugated with Compound 43 via the silyl linker.

FIGURE 11: A drawing of the unwound wire used to make the stent of Example 26.

FIGURE 12: A close up of the bends and "eyes" in the wire of Figure 11

FIGURE 13: A side view drawing of the helically wound stent, fully expanded.

FIGURE 14: A cross-section of the helically wound stent.

FIGURE 15: A side view drawing of the helically wound stent, compressed.

FIGURE 16: A detailed view of the helically wound stent, showing the angle of the helix (β) and the angle between the zig-zags of the stent wire (α).

Definitions

As utilized herein, the term "biomaterial" includes any generally non-toxic material commonly used in applications where contact with biological systems is expected. Examples of biomaterials include: metals such as stainless steel, tantalum, titanium, nitinol, gold, platinum, inconel, iridium, silver, molybdenum, tungsten, nickel, chromium, vanadium, and alloys comprising any of the foregoing metals and alloys; ceramics such as hydroxyapatite, tricalcium phosphate, and aluminum-calcium-phosphorus oxide; polymers such as polyurethane, polyurethane, polyalkylene glycols, polyethylene terephthalate, ultra high molecular weight polyethylenes, polypropylene, polyesters, polyamides, polycarbonates, polyorthoesters, polyesteramides, polysiloxanes, polyolefins, polytetrafluoroethylenes, polysulfones, polyanhydrides, polyalkylene oxides, polyvinyl halides,

09-07-2016

09-07-2016

[illegible]

09-06-2018

5

10

15

25

30



THE UNIVERSITY OF CHICAGO

molecular weight polyethylene glycol, hexamethyl di(imidi)-isocyanate, silyl chloride, and polyglycine.

The term "copolymerization" means that the non-proteinaceous catalyst is copolymerized with the monomer which forms the biomaterial, and thus integrated into the polymer chain of the modified biomaterial.


The term "inflammatory response" means that the material elicits the inflammation of the surrounding tissues and the production of degradative enzymes and reactive molecular species when exposed to biological systems.

The term "substituted" means that the described moiety has one or more of the following substituents:
(1) $-NR_{30}R_{31}$ wherein R_{30} and R_{31} are independently selected from hydrogen, alkyl, aryl or aralkyl; or R_{30} is hydrogen, alkyl, aryl or aralkyl and R_{31} is selected from the group consisting of $-NR_{32}R_{33}$, $-OH$, $-OR_{34}$,






wherein R_{32} and R_{33} are independently hydrogen, alkyl, aryl or acyl, R_{34} is alkyl, aryl or alkaryl, Z' is hydrogen, alkyl, aryl, alkaryl, $-OR_{34}$, $-SR_{34}$ or $-NR_{40}R_{41}$. R_{37} is alkyl, aryl or alkaryl, X' is oxygen or sulfur, and R_{38} and R_{39} are independently selected from hydrogen, alkyl, or aryl;

(2) $-\text{SR}_{42}$ wherein R_{42} is hydrogen, alkyl, aryl, alkaryl, $-\text{NR}_{32}\text{R}_{33}$, SR_{34} ,




wherein R_{43} is $-\text{OH}$, $-\text{OR}_{34}$ or $-\text{NR}_{32}\text{R}_{33}$, and A and B are independently $-\text{OR}_{34}$, $-\text{SR}_{34}$ or $-\text{NR}_{32}\text{R}_{33}$

- 5 (3) wherein x is 1 or 2, and R_{44} is halide, alkyl, aryl, alkaryl, $-\text{OH}$, $-\text{OR}_{34}$ or $-\text{NR}_{32}\text{R}_{33}$;
 (4) $-\text{OR}_{45}$ wherein R_{45} is hydrogen, alkyl, aryl, alkaryl, $-\text{NR}_{32}\text{R}_{33}$,




- 10 whe NR_{32} rein D and E are independently $-\text{OR}_{34}$ or $-\text{R}_{33}$;




009250-2008560

Introduction



(7)



- 10

20

glycidyl ($\text{H}_2\text{COCH-}$), carboxyl (HOCO-), hydroxy (HO-), and chloromethyl ($\text{ClH}_2\text{C-}$), silyl or silyl chloride, and substituted or unsubstituted alkenyl, alkynyl, aryl, and heteroaryl.

5 The term "alkyl", alone or in combination, means a straight-chain or branched-chain alkyl radical containing from 1 to about 22 carbon atoms, preferably from about 1 to about 18 carbon atoms, and most preferably from about 1 to about 12 carbon atoms. Examples of such radicals
10 include, but are not limited to, methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl, iso-amyl, hexyl, octyl, nonyl, decyl, dodecyl, tetradecyl, hexadecyl, octadecyl and eicosyl.

15 The term "alkenyl", alone or in combination, means an alkyl radical having one or more double bonds. Examples of such alkenyl radicals include, but are not limited to, ethenyl, propenyl, 1-butenyl, cis-2-butenyl, trans-2-butenyl, iso-butylenyl, cis-2-pentenyl, trans-2-pentenyl, 3-methyl-1-butenyl,
20 2,3-dimethyl-2-butenyl, 1-pentenyl, 1-hexenyl, 1-octenyl, decenyl, dodecenyl, tetradecenyl, hexadecenyl, cis- and trans-9-octadecenyl, 1,3-pentadienyl, 2,4-pentadienyl, 2,3-pentadienyl, 1,3-hexadienyl, 2,4-hexadienyl, 5,8,11,14-eicosatetraenyl, and 9,12,15-octadecatrienyl.

25 The term "alkynyl", alone or in combination, means an alkyl radical having one or more triple bonds. Examples of such alkynyl groups include, but are not limited to, ethynyl, propynyl (propargyl), 1-butyne, 1-octynyl, 9-octadecynyl, 1,3-pentadiynyl,
30 2,4-pentadiynyl, 1,3-hexadiynyl, and 2,4-hexadiynyl.

 The term "cycloalkyl", alone or in combination means a cycloalkyl radical containing from 3 to about 10, preferably from 3 to about 8, and most preferably from 3 to about 6, carbon atoms. Examples of such cycloalkyl

03530007-052600

radicals include, but are not limited to, cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, cycloheptyl, cyclooctyl, and perhydronaphthyl.

The term "cycloalkylalkyl" means an alkyl radical as defined above which is substituted by a cycloalkyl radical as defined above. Examples of cycloalkylalkyl radicals include, but are not limited to, cyclohexylmethyl, cyclopentylmethyl, (4-isopropylcyclohexyl)methyl, (4-t-butyl-cyclohexyl)methyl, 3-cyclohexylpropyl, 2-cyclohexylmethylpentyl, 3-cyclopentylmethylhexyl, 1-(4-neopentylcyclohexyl)methylhexyl, and 1-(4-isopropylcyclohexyl)methylheptyl.

The term "cycloalkylcycloalkyl" means a cycloalkyl radical as defined above which is substituted by another cycloalkyl radical as defined above. Examples of cycloalkylcycloalkyl radicals include, but are not limited to, cyclohexylcyclopentyl and cyclohexylcyclohexyl.

The term "cycloalkenyl", alone or in combination, means a cycloalkyl radical having one or more double bonds. Examples of cycloalkenyl radicals include, but are not limited to, cyclopentenyl, cyclohexenyl, cyclooctenyl, cyclopentadienyl, cyclohexadienyl and cyclooctadienyl.

The term "cycloalkenylalkyl" means an alkyl radical as defined above which is substituted by a cycloalkenyl radical as defined above. Examples of cycloalkenylalkyl radicals include, but are not limited to, 2-cyclohexen-1-ylmethyl, 1-cyclopenten-1-ylmethyl, 2-(1-cyclohexen-1-yl)ethyl, 3-(1-cyclopenten-1-yl)propyl, 1-(1-cyclohexen-1-ylmethyl)pentyl, 1-(1-cyclopenten-1-yl)hexyl, 6-(1-cyclohexen-1-yl)hexyl,

05560007-052600

1-(1-cyclopenten-1-yl)nonyl and
1-(1-cyclohexen-1-yl)nonyl.

The terms "alkylcycloalkyl" and "alkenylcycloalkyl" mean a cycloalkyl radical as defined above which is substituted by an alkyl or alkenyl radical as defined above. Examples of alkylcycloalkyl and alkenylcycloalkyl radicals include, but are not limited to, 2-ethylcyclobutyl, 1-methylcyclopentyl, 1-hexylcyclopentyl, 1-methylcyclohexyl, 1-(9-octadecenyl)cyclopentyl and 1-(9-octadecenyl)cyclohexyl.

The terms "alkylcycloalkenyl" and "alkenylcycloalkenyl" means a cycloalkenyl radical as defined above which is substituted by an alkyl or alkenyl radical as defined above. Examples of alkylcycloalkenyl and alkenylcycloalkenyl radicals include, but are not limited to, 1-methyl-2-cyclopentyl, 1-hexyl-2-cyclopentenyl, 1-ethyl-2-cyclohexenyl, 1-butyl-2-cyclohexenyl, 1-(9-octadecenyl)-2-cyclohexenyl and 1-(2-pentenyl)-2-cyclohexenyl.

The term "aryl", alone or in combination, means a phenyl or naphthyl radical which optionally carries one or more substituents selected from alkyl, cycloalkyl, cycloalkenyl, aryl, heterocycle, alkoxyaryl, alkaryl, alkoxy, halogen, hydroxy, amine, cyano, nitro, alkylthio, phenoxy, ether, trifluoromethyl and the like, such as phenyl, p-tolyl, 4-methoxyphenyl, 4-(tert-butoxy)phenyl, 4-fluorophenyl, 4-chlorophenyl, 4-hydroxyphenyl, 1-naphthyl, 2-naphthyl, and the like.

The term "aralkyl", alone or in combination, means an alkyl or cycloalkyl radical as defined above in which one hydrogen atom is replaced by an aryl radical as defined above, such as benzyl, 2-phenylethyl, and the like.

0956007-052600

The term "heterocyclic" means ring structures containing at least one other kind of atom, in addition to carbon, in the ring. The most common of the other kinds of atoms include nitrogen, oxygen and sulfur.

5 Examples of heterocyclics include, but are not limited to, pyrrolidinyl, piperidyl, imidazolidinyl, tetrahydrofuryl, tetrahydrothienyl, furyl, thienyl, pyridyl, quinolyl, isoquinolyl, pyridazinyl, pyrazinyl, indolyl, imidazolyl, oxazolyl, thiazolyl, pyrazolyl,
10 pyridinyl, benzoxadiazolyl, benzothiadiazolyl, triazolyl and tetrazolyl groups.

The term "saturated, partially saturated or unsaturated cyclic" means fused ring structures in which 2 carbons of the ring are also part of the
15 fifteen-membered macrocyclic ligand. The ring structure can contain 3 to 20 carbon atoms, preferably 5 to 10 carbon atoms, and can also contain one or more other kinds of atoms in addition to carbon. The most common of the other kinds of atoms include nitrogen, oxygen and
20 sulfur. The ring structure can also contain more than one ring.

The term "saturated, partially saturated or unsaturated ring structure" means a ring structure in which one carbon of the ring is also part of the
25 fifteen-membered macrocyclic ligand. The ring structure can contain 3 to 20, preferably 5 to 10, carbon atoms and can also contain nitrogen, oxygen and/or sulfur atoms.

The term "nitrogen containing heterocycle" means ring structures in which 2 carbons and a nitrogen of the
30 ring are also part of the fifteen-membered macrocyclic ligand. The ring structure can contain 2 to 20, preferably 4 to 10, carbon atoms, can be substituted or unsubstituted, partially or fully unsaturated or saturated, and can also contain nitrogen, oxygen and/or

sulfur atoms in the portion of the ring which is not also part of the fifteen-membered macrocyclic ligand.

The term "organic acid anion" refers to carboxylic acid anions having from about 1 to about 18 carbon atoms.

5 The term "halide" means chloride, fluoride, iodide, or bromide.

As used herein, "R" groups means all of the R groups attached to the carbon atoms of the macrocycle, i.e., R, R', R₁, R'₁, R₂, R'₂, R₃, R'₃, R₄, R'₄, R₅, R'₅, R₆, R'₆, R₇,
10 R'₇, R₈, R'₈, R₉.

All references cited herein are explicitly incorporated by reference.

DETAILED DESCRIPTION OF THE INVENTION

05580007-052600
009250-2000550

The present invention concerns novel modified
15 biomaterials and methods for the production of such materials. Prior to applicants' invention, it was not known that non-proteinaceous catalysts for the
20 dismutation of superoxide could be immobilized on the surface of a biomaterial and still retain their catalytic function and exhibit an anti-inflammatory effect.
However, applicants have found that these catalysts can be efficaciously immobilized on biomaterial surfaces and still retain superoxide dismutating ability, as shown by
25 Example 23. Applicants have also found that these modified biomaterials have greatly improved durability and decreased inflammatory response when exposed to biological systems, such as the rat model in Examples 21 and 22.

Biomaterials and Non-Proteinaceous Catalysts for the
Dismutation of Superoxide for Use in the Present
Invention

5 A variety of biomaterials are appropriate for
modification in the present invention. The biomaterial to
be modified can be any biologically compatible metal,
ceramic, polymer, biopolymer, or a composite thereof.
Metals suitable for use in the present invention include
10 stainless steel, tantalum, titanium, nitinol, gold,
platinum, inconel, iridium, silver, molybdenum, tungsten,
nickel, chromium, vanadium, and alloys comprising any of
the foregoing metals and alloys. Ceramics suitable for
use in the present invention include hydroxyapatite,
tricalcium phosphate, and aluminum-calcium-phosphorus
15 oxide. Polymers suitable for use in the present
invention include polyurethane, polyureaurethane,
polyalkylene glycols, polyethylene teraphthalate, ultra
high molecular weight polyethylenes, polypropylene,
polyesters, polyamides, polycarbonates, polyorthoesters,
20 polyesteramides, polysiloxanes, polyolefins,
polytetrafluoroethylenes, polysulfones, polyanhydrides,
polyalkylene oxides, polyvinyl halides, polyvinylidene
halides, acrylics, methacrylics, polyacrylonitriles,
polyvinyls, polyphosphazenes, polyethylene-co-acrylic
25 acid, silicones, block copolymers of any of the foregoing
polymers, random copolymers of any of the foregoing
polymers, graft copolymers of any of the foregoing
polymers, crosslinked polymers of any of the foregoing
polymers, hydrogels, and mixtures of any of the foregoing
30 polymers. Biopolymers suitable for use in the present
invention are chitin, chitosan, cellulose, methyl
cellulose, hyaluronic acid, keratin, fibroin, collagen,
elastin, and saccharide polymers. Composite materials
which may be used in the present invention comprise a

03560007 03560000

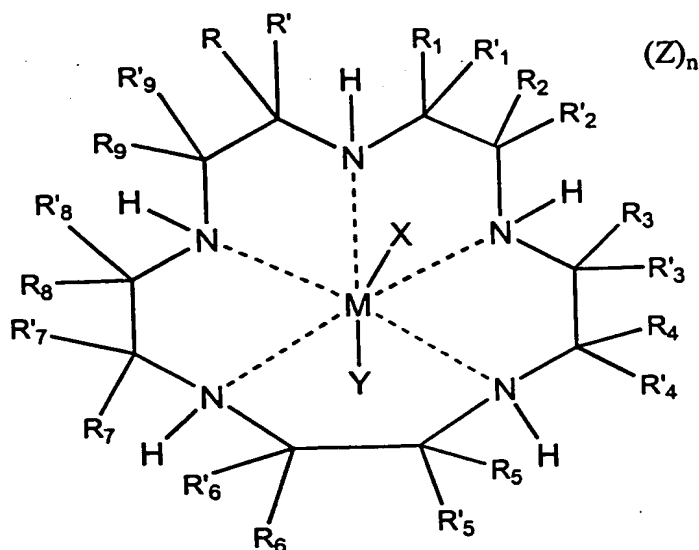
relatively inelastic phase such as carbon, hydroxy apatite, tricalcium phosphate, silicates, ceramics, or metals, and a relatively elastic phase such as a polymer or biopolymer.

5 Where the method used to modify the biomaterial is surface covalent conjugation, the unmodified biomaterial should contain, or be chemically derivatized to contain, a reactive moiety. Preferred reactive moieties include acid halide (XCO- wherein X= Cl, F, Br, I), amino (H₂N-),
10 isocyanate (OCN-), mercapto (HS-), glycidyl (H₂COCH-), carboxyl (HOCO-), hydroxy (HO-), and chloromethyl (ClH₂C-), silyl or silyl chloride, and substituted or unsubstituted alkenyl, alkynyl, aryl, and heteroaryl moieties.

15 Applicants have discovered that these compounds, especially the preferred pentaaza non-proteinaceous catalysts, will survive a wide range of chemical reactions and processing conditions including extreme chemical and thermal conditions. Particularly, the
20 PACPeD catalysts have been demonstrated by the applicants to be stable at temperatures up to about 350°C, and at pH of about 4. Additionally, the PACPeD's are soluble in a wide range of solvents, including water, methanol, ethanol, methylene chloride, DMSO, DMF, and DMAC, and are
25 partially soluble in toluene and acetonitrile. By adding polar or non-polar substituents at the R group positions on the PACPeD or other non-proteinaceous catalysts, applicants have improved their solubility in specific solvents for particular reactions, and for use with
30 particular biomaterials. As illustrated by Table 1 below, several reactive functional groups may be added as pendant moieties without detrimentally affecting the catalyst's superoxide dismutating ability.

009250 032600 0550007


The non-proteinaceous catalysts for the dismutation of superoxide for use in the present invention preferably comprise an organic ligand and a transition metal cation. Particularly preferred catalysts are manganese and iron
 5 chelates of pentaazacyclopentadecane compounds, which can be represented by the following formula:



wherein M is a cation of a transition metal, preferably manganese or iron; wherein R, R', R₁, R'₁, R₂, R'₂, R₃, R'₃, R₄, R'₄, R₅, R'₅, R₆, R'₆, R₇, R'₇, R₈, R'₈, R₉, and R'₉,
 10 independently represent hydrogen, or substituted or unsubstituted alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, cycloalkylalkyl, cycloalkylcycloalkyl, cycloalkenylalkyl, alkylcycloalkyl, alkylcycloalkenyl, alkenylcycloalkyl, alkenylcycloalkenyl, heterocyclic,
 15 aryl and aralkyl radicals; R₁ or R'₁ and R₂ or R'₂, R₃ or R'₃ and R₄ or R'₄, R₅ or R'₅ and R₆ or R'₆, R₇ or R'₇ and R₈ or R'₈, and R₉ or R'₉, and R or R' together with the carbon atoms to which they are attached independently form a substituted or unsubstituted, saturated, partially
 20 saturated or unsaturated cyclic or heterocyclic having 3

009350-000000

to 20 carbon atoms; R or R' and R₁ or R'₁, R₂ or R'₂ and R₃ or R'₃, R₄ or R'₄ and R₅ or R'₅, R₆ or R'₆ and R₇ or R'₇, and R₈ or R'₈ and R₉ or R'₉, together with the carbon atoms to which they are attached independently form a substituted
5 or unsubstituted nitrogen containing heterocycle having 2 to 20 carbon atoms, provided that when the nitrogen containing heterocycle is an aromatic heterocycle which does not contain a hydrogen attached to the nitrogen, the hydrogen attached to the nitrogen as shown in the above
10 formula, which nitrogen is also in the macrocyclic ligand or complex, and the R groups attached to the included carbon atoms of the macrocycle are absent; R and R', R₁ and R'₁, R₂ and R'₂, R₃ and R'₃, R₄ and R'₄, R₅ and R'₅, R₆ and R'₆, R₇ and R'₇, R₈ and R'₈, and R₉ and R'₉, together
15 with the carbon atom to which they are attached independently form a saturated, partially saturated, or unsaturated cyclic or heterocyclic having 3 to 20 carbon atoms; and one of R, R', R₁, R'₁, R₂, R'₂, R₃, R'₃, R₄, R'₄, R₅, R'₅, R₆, R'₆, R₇, R'₇, R₈, R'₈, R₉, and R'₉, together with
20 a different one of R, R', R₁, R'₁, R₂, R'₂, R₃, R'₃, R₄, R'₄, R₅, R'₅, R₆, R'₆, R₇, R'₇, R₈, R'₈, R₉, and R'₉, which is attached to a different carbon atom in the macrocyclic ligand may be bound to form a strap represented by the formula



wherein w, x, y and z independently are integers from 0 to 10 and M, L and J are independently selected from the group consisting of alkyl, alkenyl, alkynyl, aryl, cycloalkyl, heteroaryl, alkaryl, alkheteroaryl, aza,
30 amide, ammonium, oxa, thia, sulfonyl, sulfinyl, sulfonamide, phosphoryl, phosphinyl, phosphino, phosphonium, keto, ester, alcohol, carbamate, urea, thiocarbonyl, borates, boranes, boraza, silyl, siloxy, silaza and combinations thereof; and combinations

05560007 0556000

thereof. Thus, the PACPeD's useful in the present invention can have any combinations of substituted or unsubstituted R groups, saturated, partially saturated or unsaturated cyclics, ring structures, nitrogen containing
5 heterocycles, or straps as defined above.

X, Y and Z represent suitable ligands or charge-neutralizing anions which are derived from any monodentate or polydentate coordinating ligand or ligand system or the corresponding anion thereof (for example
10 benzoic acid or benzoate anion, phenol or phenoxide anion, alcohol or alkoxide anion). X, Y and Z are independently selected from the group consisting of halide, oxo, aquo, hydroxo, alcohol, phenol, dioxygen, peroxy, hydroperoxy, alkylperoxy, arylperoxy, ammonia,
15 alkylamino, arylamino, heterocycloalkyl amino, heterocycloaryl amino, amine oxides, hydrazine, alkyl hydrazine, aryl hydrazine, nitric oxide, cyanide, cyanate, thiocyanate, isocyanate, isothiocyanate, alkyl nitrile, aryl nitrile, alkyl isonitrile, aryl isonitrile,
20 nitrate, nitrite, azido, alkyl sulfonic acid, aryl sulfonic acid, alkyl sulfoxide, aryl sulfoxide, alkyl aryl sulfoxide, alkyl sulfenic acid, aryl sulfenic acid, alkyl sulfinic acid, aryl sulfinic acid, alkyl thiol carboxylic acid, aryl thiol carboxylic acid, alkyl thiol
25 thiocarboxylic acid, aryl thiol thiocarboxylic acid, alkyl carboxylic acid (such as acetic acid, trifluoroacetic acid, oxalic acid), aryl carboxylic acid (such as benzoic acid, phthalic acid), urea, alkyl urea, aryl urea, alkyl aryl urea, thiourea, alkyl thiourea,
30 aryl thiourea, alkyl aryl thiourea, sulfate, sulfite, bisulfate, bisulfite, thiosulfate, thiosulfite, hydrosulfite, alkyl phosphine, aryl phosphine, alkyl phosphine oxide, aryl phosphine oxide, alkyl aryl phosphine oxide, alkyl phosphine sulfide, aryl phosphine

09580007 00000000

09530007 "052600
sulfide, alkyl aryl phosphine sulfide, alkyl phosphonic acid, aryl phosphonic acid, alkyl phosphinic acid, aryl phosphinic acid, alkyl phosphinous acid, aryl phosphinous acid, phosphate, thiophosphate, phosphite, pyrophosphite, triphosphate, hydrogen phosphate, dihydrogen phosphate, 5 alkyl guanidino, aryl guanidino, alkyl aryl guanidino, alkyl carbamate, aryl carbamate, alkyl aryl carbamate, alkyl thiocarbamate aryl thiocarbamate, alkyl aryl thiocarbamate, alkyl dithiocarbamate, aryl dithiocarbamate, 10 alkyl aryl dithiocarbamate, bicarbonate, carbonate, perchlorate, chlorate, chlorite, hypochlorite, perbromate, bromate, bromite, hypobromite, tetrahalomanganate, tetrafluoroborate, hexafluorophosphate, hexafluoroantimonate, hypophosphite, 15 iodate, periodate, metaborate, tetraaryl borate, tetra alkyl borate, tartrate, salicylate, succinate, citrate, ascorbate, saccharinate, amino acid, hydroxamic acid, thiotosylate, and anions of ion exchange resins. The preferred ligands from which X, Y and Z are selected 20 include halide, organic acid, nitrate and bicarbonate anions.





The "R" groups attached to the carbon atoms of the macrocycle can be in the axial or equatorial position relative to the macrocycle. When the "R" group is other 25 than hydrogen or when two adjacent "R" groups, i.e., on adjacent carbon atoms, together with the carbon atoms to which they are attached form a saturated, partially saturated or unsaturated cyclic or a nitrogen containing heterocycle, or when two R groups on the same carbon atom 30 together with the carbon atom to which they are attached form a saturated, partially saturated or unsaturated ring structure, it is preferred that at least some of the "R" groups are in the equatorial position for reasons of improved activity and stability. This is particularly





true when the complex contains more than one "R" group which is not hydrogen.

Where the modification of the biomaterial is effected by the surface covalent conjugation or copolymerization with the unmodified biomaterial, it is preferred that the PACPeD contain a pendant reactive moiety. This reactive moiety may be on a "R" group, a cyclic, a heterocyclic, a nitrogen containing heterocyclic, or a strap structure as described above. Preferred moieties on the non-proteinaceous catalyst for use in the present invention include of amino ($-\text{NH}_2$), carboxyl ($-\text{COOH}$), isocyanate ($-\text{NCO}$), mercapto ($-\text{SH}$), hydroxy ($-\text{OH}$), silyl chloride ($-\text{SiCl}_2$), acid halide ($-\text{OCX}$ wherein $\text{X} = \text{Cl}, \text{F}, \text{Br}, \text{I}$), halide ($-\text{X}$ wherein $\text{X} = \text{Cl}, \text{F}, \text{Br}, \text{I}$), glycidyl ($-\text{HCOCH}_2$), and substituted or unsubstituted alkenyl, alkynyl, and aryl moieties.





Preferred PACPeD's for modification of biomaterials compounds are those wherein at least one "R" group contains a reactive functional group, and those wherein at least one, of R or R' and R_1 or R'_1 , R_2 or R'_2 and R_3 or R'_3 , R_4 or R'_4 and R_5 or R'_5 , R_6 or R'_6 and R_7 or R'_7 , and R_8 or R'_8 and R_9 or R'_9 , together with the carbon atoms to which they are attached are bound to form a nitrogen containing heterocycle having 2 to 20 carbon atoms and all the remaining "R" groups are independently selected from hydrogen, saturated, partially saturated or unsaturated cyclic or alkyl groups. Examples of PACPeD catalysts useful in making the modified biomaterials of the invention include, but are not limited to, the following compounds:

2025年6月27日





COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 <p>1</p>	341.19	4.13	2.24
 <p>2</p>	431.31	7.21	2.57
 <p>3</p>	403.26		1.00
 <p>4</p>	379.23		1.75

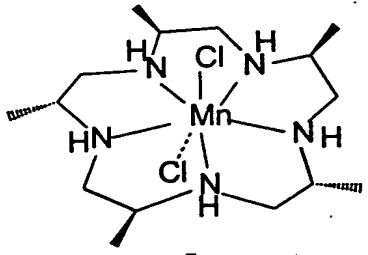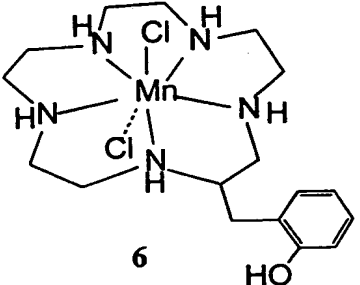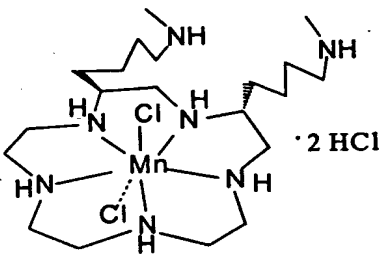COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 5	411.77	3.82	3.90
 6	447.31	6.99	3.83
 7	501.37	2.00	1.58
 8	584.39	5.95	5.90


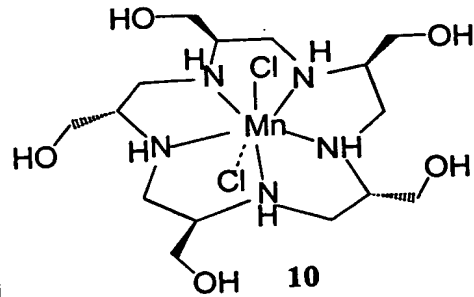

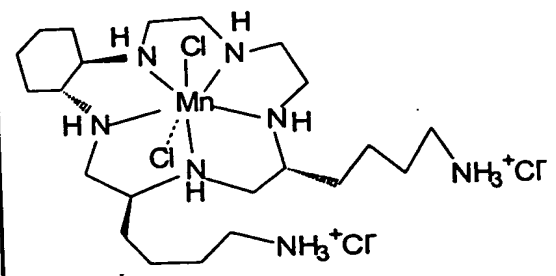
000000 000000 000000

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 9	423.22	2.77	1.68
 10	491.32	2.68	2.68
 11	452.37	4.79	2.85
 12	610.42	10.20	5.39


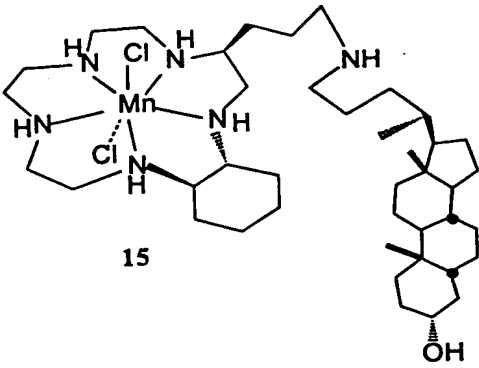
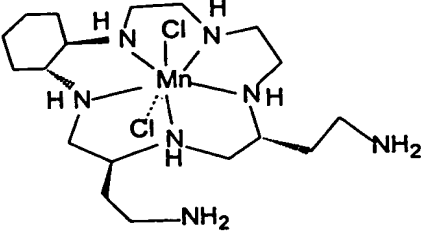
09580007-05E000




COMPOUND	MOL. WT.	k _{cat} pH 7.4	k _{cat} pH 8.1
 <p>13</p>	383.27		1.63
 <p>14</p>	506.46	7.58	3.84
 <p>15</p>	795.95	2.41	0.77
 <p>16</p>	481.41	2.48	1.97

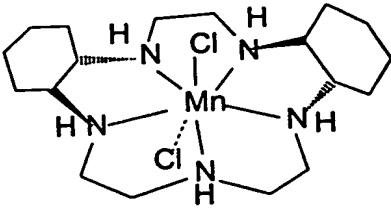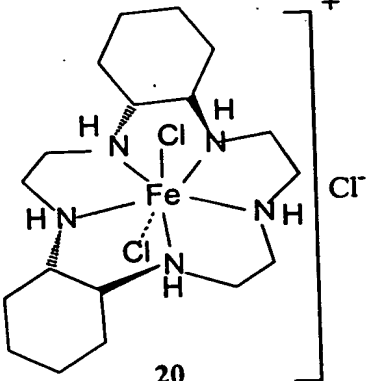COPIES OF THE REPORT




COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 17	449.37	12.60	4.09
 18	463.40	15.00	4.00
 19	437.36	8.48	4.08
 20	485.70	3.29	0.93

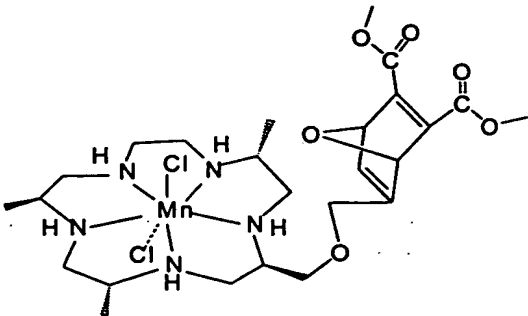
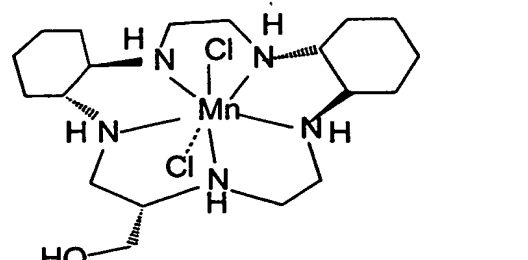
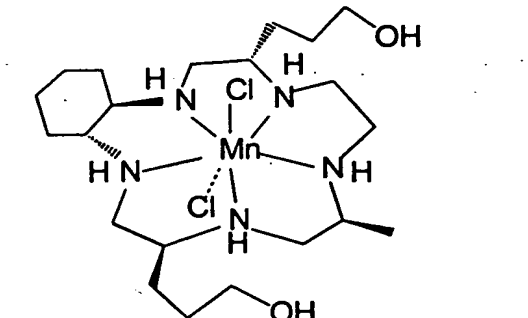
009250-2000550

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 <p>25</p>	724.39	4.04	2.34
 <p>26</p>	479.40	10.12	3.47
 <p>27</p>	525.47	4.83	2.50





COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 28	411.56		
 29	454.10	2.86	2.02
 30	409.22	0.20	0.20


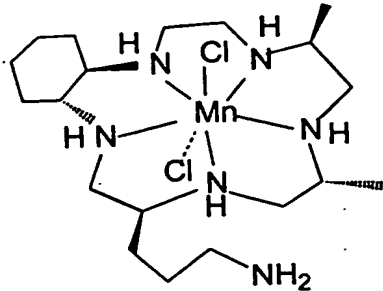
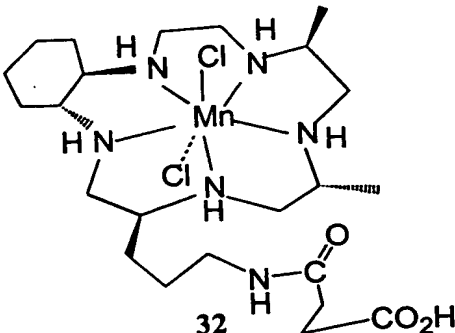
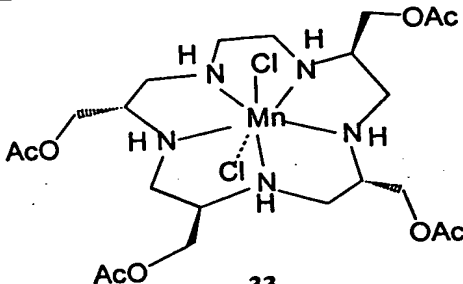
009269 20090550

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 <p>31</p>	480.43	2.97	2.91
 <p>32</p>	681.70	1.74	1.43
 <p>33</p>	629.44	7.27	4.08


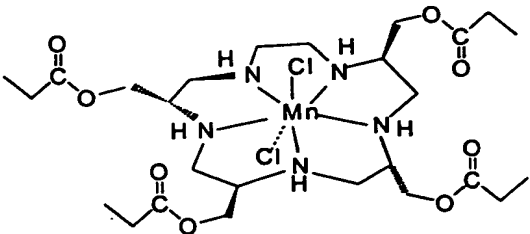
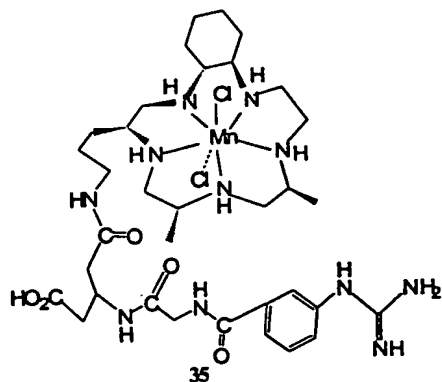
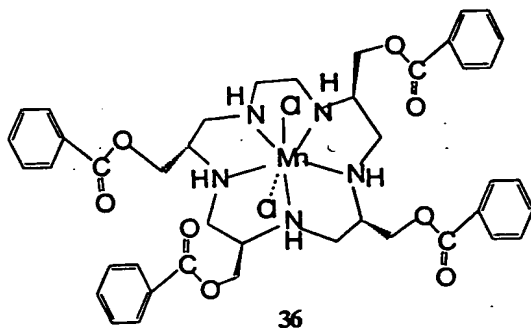
COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 34	685.55	2.70	2.78
 35	827.76	4.38	2.87
 36	877.72	0.63	0.49

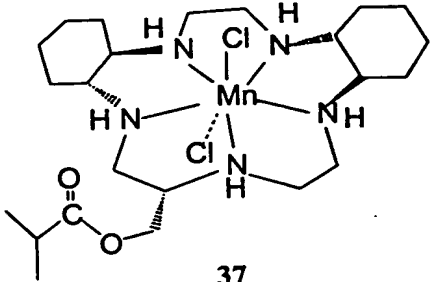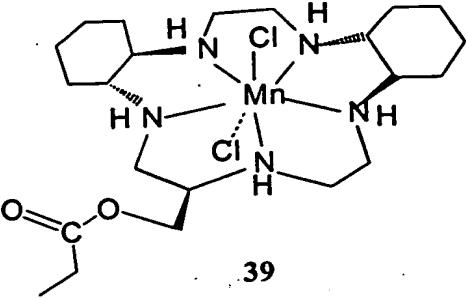0093350-0008550




COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 <p>37</p>	549.49	3.08	
 <p>38</p>	483.39	1.64	1.19
 <p>39</p>	535.46	3.89	2.32
 <p>40</p>	511.44	90.00	11.00

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 41	511.44	1.57	0.41
 42	517.83	1.18	0.98
 43			
 H ₃ C(H ₂ C) ₁₃ 44	679.76	1.02	0.84

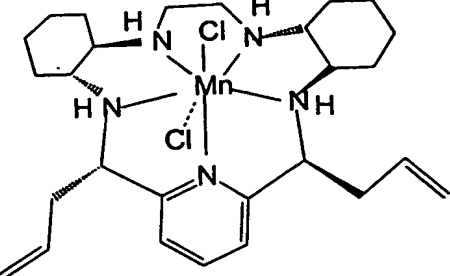


009269 009269

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 45	587.51	2.99	0.95
 46	563.52		
 47	537.48		2.16
 48	562.28	1.68	

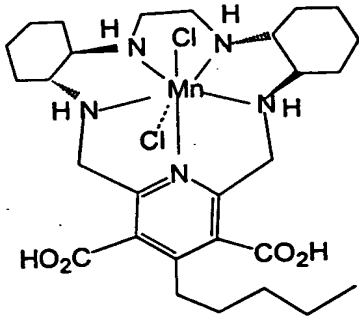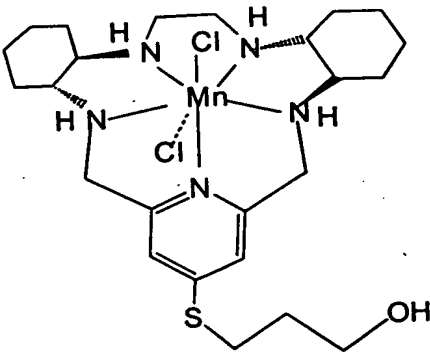000000" 40000000

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 49	614.52		
 50	641.50	1.31	
 51	573.53	3.97	1.14

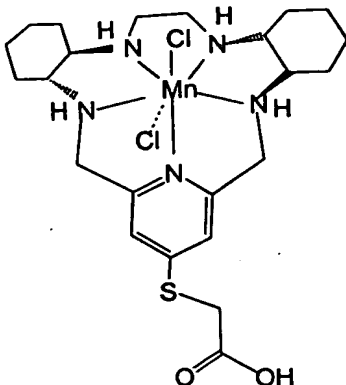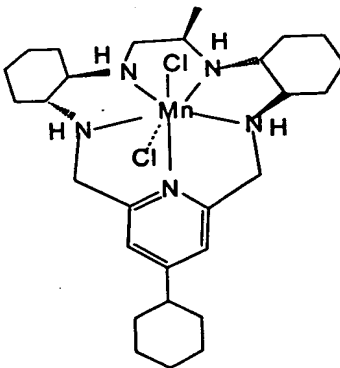000000 000000 000000

COMPOUND	MOL. WT.	k_{cat} pH 7.4	k_{cat} pH 8.1
 <p>52</p>	537.02	3.01	
 <p>53</p>			
 <p>54</p>	579.56	2.68	

Activity of the non-proteinaceous catalysts for the dismutation of superoxide can be demonstrated using the stopped-flow kinetic analysis technique as described in Example 24, and in Riley, D. P., Rivers, W. J. and Weiss, R. H., "Stopped-Flow Kinetic Analysis for Monitoring Superoxide Decay in Aqueous Systems," Anal. Biochem., 196, 344-349 (1991), which is incorporated by reference herein. Stopped-flow kinetic analysis is an accurate and direct method for quantitatively monitoring the decay rates of superoxide in water. The stopped-flow kinetic analysis is suitable for screening compounds for SOD activity and activity of the compounds or complexes of the present invention, as shown by stopped-flow analysis, correlate to usefulness in the modified biomaterials and processes of the present invention. The catalytic constants given for the exemplary compounds in the table above were determined using this method.

As can be observed from the table, a wide variety of PACPeD's with superoxide dismutating activity may be readily synthesized. Generally, the transition metal center of the catalyst is thought to be the active site of catalysis, wherein the manganese or iron ion cycles between the (II) and (III) states. Thus, as long as the redox potential of the ion is in a range in which superoxide anion can reduce the oxidized metal and protonated superoxide can oxidize the reduced metal, and steric hindrance of the approach of the superoxide anion is minimal, the catalyst will function with a k_{cat} of about 10^{-6} to 10^{-8} .

Without limiting themselves to any particular theory, applicants propose that the mechanism described in Riley, et al., 1999, is a reasonable approximation of how the PACPeD catalysts dismutate superoxide. In order for the complex to exhibit superoxide dismutase activity,

the ligand should be able to fold into a conformation that allows the stabilization of an octahedral complex between the superoxide anion and the five nitrogens of the ligand ring. If a compound contains several
5 conjugated double bonds within the main 15-membered ring of the ligand, which hold the ring in a rigid conformation, the compound would not be expected to exhibit catalytic activity. R groups which are coordinated with the transition metal ion freeze the
10 conformation of the ligand, and would be expected to be poor catalysts. Large, highly electronegative groups pendant on the macrocycle would also sterically hinder the necessary conformational change. The lack of functionality in these types of PACPeD derivatives would
15 not be unexpected by one of ordinary skill in the art. Specifically, one of skill in the art would avoid materially changing the flexibility of the PACPeD by adding many large groups which would cause steric hindrance, or placing too many double bonds into the main
20 PACPeD ring. This effect would also be present in certain geometric arrangements of smaller R groups which constrain the complex to a rigid, planar geometry. Those particular compounds which do not exhibit superoxide dismutase activity should not be used to modify the
25 biomaterials of the present invention.

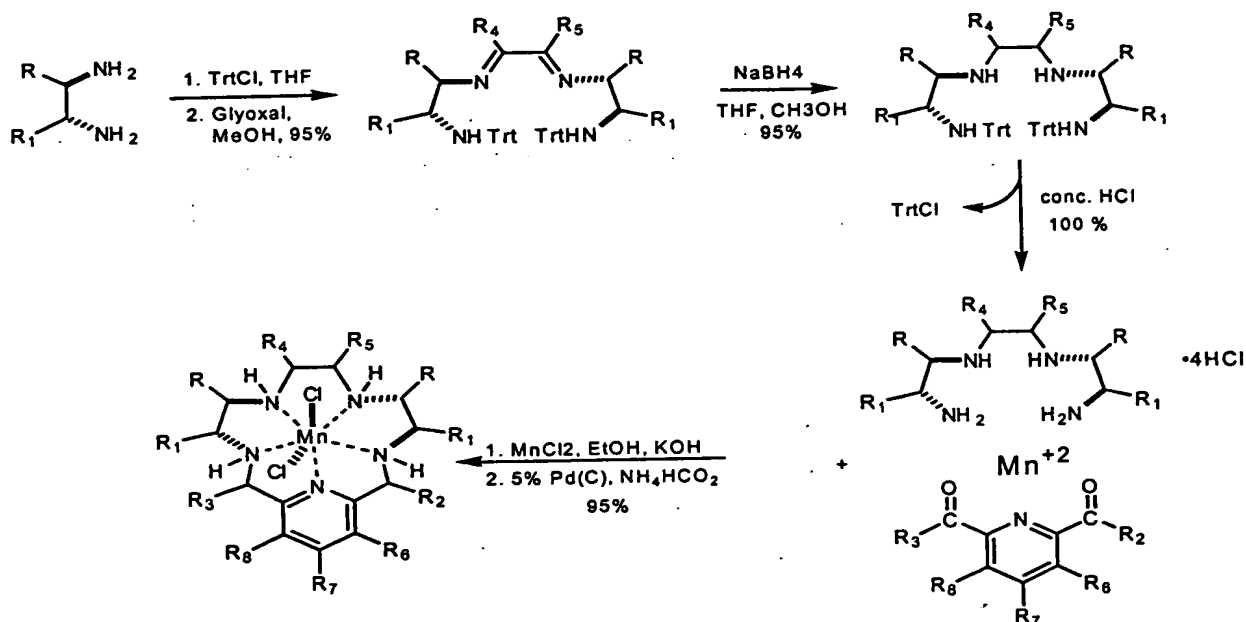
Given these examples and guidelines, one of ordinary skill would be able to choose a PACPeD catalyst for use in the present invention which would contain any required functional group, while still retaining superoxide
30 dismutating activity. The PACPeD catalysts described above may be produced by the methods disclosed in U.S. Pat. No. 5,610,293. However, it is preferred that the PACPeD catalysts used in the present invention be

synthesized by the template method, diagramed below. This synthesis method is advantageous over previously disclosed methods in that cyclization yields utilizing the template method are usually about 90%, as compared to about 20% with previous methods. Several diamines are commercially available as starting materials, or a diamine may be synthesized. The diamine is reacted with titryl chloride in anhydrous methylene chloride at 0°C and allowed to warm to room temperature overnight, with stirring. The product is then combined with glyoxal in methanol and stirred for 16 hours. The glyoxal bisimine product is then reduced with a borohydride in THF. If a non-symmetrical product is desired, two diamines may be used as starting materials. In addition, a substituted glyoxal may be used if groups pendant from the macrocycle opposite the pyridine are desired (R_5 and R_4). Commercially available tetraamines may also be used in place of the reduced glyoxal bisimine. After reduction of the glyoxal bisimine, the product is combined with a 2,6 dicarbonyl substituted pyridine, such as 2,6, dicarboxaldehyde pyridine or 2,6 diacetyl pyridine, and a salt of manganese or iron under basic conditions. The transition metal ion serves as a template to promote cyclization of the substituted pyridine and the tetraamine. Several 2,6 dicarbonyl substituted pyridines are available commercially, allowing for the facile production of a variety of ligands with groups pendant from the macrocycle proximal to the pyridine (R_2 and R_3). Additionally, pyridines with additional substitutions (R_6 , R_7 and R_8) may also be used. After cyclization, the product is reduced with ammonium formate and a palladium catalyst over a period of 3-4 days. In addition to the "R" substitutions, "R'" groups may also be substituted at the same carbons. "R" and "R'" groups may be any of

05580007-0525000

those indicated above. The process may be varied according to principles well known to one of ordinary skill in the art in order to accommodate various starting materials.

5




Although the bisimine produced in the template cyclization reaction step above may be reduced by more conventional means using hydrogen gas, it is preferred that the bisimine be reduced with ammonium formate in the presence of a palladium catalyst, as illustrated in Example 6. This process offers the advantages of increased safety and high reduction efficiency.

The PACPeD's useful in the present invention can possess one or more asymmetric carbon atoms and are thus capable of existing in the form of optical isomers as well as in the form of racemic or nonracemic mixtures thereof. The optical isomers can be obtained by

resolution of the racemic mixtures according to conventional processes, for example by formation of diastereoisomeric salts by treatment with an optically active acid. Examples of appropriate acids are tartaric, diacetyltartaric, dibenzoyltartaric, ditoluoyltartaric and camphorsulfonic acid and then separation of the mixture of diastereoisomers by crystallization followed by liberation of the optically active bases from these salts. A different process for separation of optical isomers involves the use of a chiral chromatography column optimally chosen to maximize the separation of the enantiomers. Still another available method involves synthesis of covalent diastereoisomeric molecules by reacting one or more secondary amine group(s) of the compounds of the invention with an optically pure acid in an activated form or an optically pure isocyanate. The synthesized diastereoisomers can be separated by conventional means such as chromatography, distillation, crystallization or sublimation, and then hydrolyzed to deliver the enantiomerically pure ligand. The optically active compounds of the invention can likewise be obtained by utilizing optically active starting materials, such as natural amino acids.

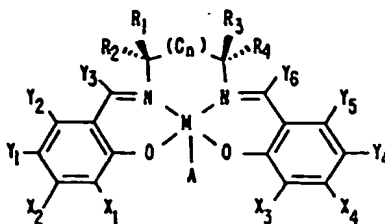Also suitable for use in the present invention, but less preferred than the PACPeD's, are the salen complexes of manganese and iron disclosed in U.S. Patent No. 5,696,109, here incorporated by reference. The term "salen complex" means a ligand complex with the general formula:



009250 2008550
0550007 052500

wherein M is a transition metal ion, preferably Mn; A is an anion, typically Cl; and n is either 0, 1, or 2. X₁, X₂, X₃, and X₄ are independently selected from the group consisting of hydrogen, silyls, aryls, aryls,
5 arylalkyls, primary alkyls, secondary alkyls, tertiary alkyls, alkoxys, aryloxys, aminos, quaternary amines, heteroatoms, and hydrogen; typically X₁ and X₃ are from the same functional group, usually hydrogen, quaternary amine, or tertiary butyl, and X₂ and X₄ are typically
10 hydrogen. Y₁, Y₂, Y₃, Y₄, Y₅, and Y₆ are independently selected from the group consisting of hydrogen, halides, alkyls, aryls, arylalkyls, silyl groups, aminos, alkyls or aryls bearing heteroatoms; aryloxys, alkoxys, and
15 halide; preferably, Y₁ and Y₄ are alkoxy, halide, or amino groups. Typically, Y₁ and Y₄ are the same. R₁, R₂, R₃, and R₄ are independently selected from the group consisting of H, CH₃, C₂H₅, C₆H₅, O-benzyl, primary alkyls, fatty acid esters, substituted alkoxyaryls, heteroatom-bearing
20 aromatic groups, arylalkyls, secondary alkyls, and tertiary alkyls. Methods of synthesizing these salen complexes are also disclosed in U.S. Patent No. 5,696,109.

Iron or manganese porphyrins, such as , such as Mn^{III} tetrakis(4-N-methylpyridyl)porphyrin, Mn^{III} tetrakis-o-(4-N-methylisonicotinamidophenyl)porphyrin, Mn^{III} tetrakis(4-N-N-N-trimethylanilinium)porphyrin, Mn^{III} tetrakis(1-methyl-4-pyridyl)porphyrin, Mn^{III} tetrakis(4-benzoic acid)porphyrin, Mn^{II} octabromo-meso-tetrakis(N-methylpyridinium-4-yl)porphyrin, Fe^{III} tetrakis(4-N-methylpyridyl)porphyrin, and Fe^{III} tetrakis-o-(4-N-methylisonicotinamidophenyl)porphyrin. may also be used
30 in the present invention. The catalytic activities and methods of purifying or synthesizing these porphyrins are well known in the organic chemistry arts.

5 The salen and porphyrin non-proteinaceous catalysts for the dismutation of superoxide also preferably contain a reactive moiety, as described above, when the methods of surface covalent conjugation or copolymerization are used to modify the biomaterial.

10 In general, the non-proteinaceous catalysts for the dismutation of superoxide used in the present invention are very stable under conditions of high heat, acid or basic conditions, and in a wide variety of solvents. However, under extreme reaction conditions the chelated transition metal ion will dissociate from the non-proteinaceous catalyst. Thus, when extreme reaction conditions are necessary to modify the biomaterial, it is preferable to modify the biomaterial with a precursor ligand of the non-proteinaceous catalyst for the dismutation of superoxide, and then afterwards react the modified biomaterial with a compound containing the appropriate transition metal in order to produce a biomaterial modified with an active non-proteinaceous catalyst for the dismutation of superoxide. For instance, when a PACPeD catalyst is used under reaction conditions of $\text{pH} < 4$, the strategy of modifying the biomaterial with the ligand should be used. This strategy is demonstrated in Example 19. Therefore, when the term non-proteinaceous catalyst for the dismutation of superoxide is used in this specification, the reader should assume that, where appropriate, the precursor ligand will be used in the modification of the biomaterial, and that the transition metal cation necessary for activity may be added at a later point in time. Conditions where this approach would be appropriate may be readily determined by one of ordinary skill in the chemical arts.

15
20
25
30

009250-2000550

Choice of Method of Modification

As previously described, the biomaterials of the present invention may be modified by the diverse methods of surface covalent conjugation, copolymerization, or admixture. The methods of surface covalent conjugation and copolymerization use covalent bonds in order to physically associate the non-proteinaceous catalyst for the dismutation of superoxide with the biomaterial. This creates a very stable physical association which preserves the superoxide dismutating activity of the modified biomaterial. In contrast, non-covalent forces create the physical association between the biomaterial and the non-proteinaceous catalysts for the dismutation of superoxide when the technique of physical admixture is used. These non-covalent forces may be weak Van der Wal's forces, or they may be stronger ionic bonding or hydrophobic interaction forces. Although ionic or hydrophobic interactions between the non-proteinaceous catalyst and the biomaterial will prevent elution of the non-proteinaceous catalyst to some degree, the catalyst will still be lost from the biomaterial over time when the biomaterial is exposed to biological tissues or fluids. Thus, it is usually preferred that the methods of covalent surface conjugation or copolymerization be used to modify biomaterials which will be exposed to biological systems for prolonged periods of time. However, uses may arise where the elution of non-proteinaceous catalysts for the dismutation of superoxide into the tissues surrounding an article comprising the modified biomaterial may be desirable. In this case, the use of biomaterials modified by the physical admixture method would be appropriate.

When composite materials are used, it may be necessary to utilize a variety of modification

05560007-05560000

05580007-052600
009250-000950

techniques. For instance, in a biomaterial composed of hydroxyapatite and polyethylene, a non-proteinaceous catalyst may be admixed with the hydroxyapatite phase of the composite, and another copolymerized with the polyethylene phase of the composites. The two composites may then be joined together into a fully modified composite biomaterial. Similarly, a composite material which utilizes carbon fiber and polypropylene could be made using a copolymerized polypropylene and a surface covalently conjugated carbon fiber. The flexibility in the production of modified biomaterials offered by the processes of the invention allows for the use of several diverse materials in a device while increasing its durability and decreasing the inflammatory response to the device.

Generally, it is preferred that the non-proteinaceous catalyst be present in an amount of about 0.001 to 25 weight percent. It is more preferable that the catalyst be present in an amount of about 0.01 to 10 weight percent. It is most preferable that the catalyst be present in an amount of about 0.05 to 5 weight percent. However, the amount of the non-proteinaceous catalyst to be used in modifying the biomaterial will depend on several factors, including the characteristics of the catalyst, the characteristics of the biomaterial, and the method of modification used. As is evident from the chart above, the catalytic activity of the non-proteinaceous catalysts for use in the present invention may vary over several orders of magnitude. Thus, less of the more efficient catalysts will be needed to obtain the same protective effects. Also, some biomaterials are more inflammatory than others. Thus, a greater amount of catalyst should be used with these biomaterials in order to counteract the strong inflammatory foreign body

response that they provoke. In addition, the amount of catalyst used to modify the biomaterial should not be so high as to significantly alter the mechanical characteristics of the biomaterial. Because a covalently conjugated catalyst is concentrated at the surface of the biomaterial used in a device, almost all of the catalyst will interact with the biological environment. Conversely, because an admixed or copolymerized catalyst is dispersed throughout the biomaterial, less of the catalyst will be available to interact with the biological environment at the surface of the biomaterial. Thus, when the catalyst is covalently conjugated to the surface of the biomaterial, less catalyst will be needed than if the catalyst is admixed or copolymerized with the biomaterial. Given the above considerations, the person of ordinary skill in the art would be able to choose a proper amount of non-proteinaceous catalyst to use in the present invention in order to achieve the desired reduction in the inflammatory response and degradation.

It is to be understood that although the non-proteinaceous catalysts used in the following processes are usually referred to in the singular, multiple catalysts may be used in any of these processes. One of ordinary skill in the art will easily be able to choose complementary catalysts for such modified biomaterials. In addition, although not specifically enumerated herein, the combination of the biomaterial modification techniques of the present invention with other biomaterial modification techniques, such as heparin coating, is contemplated within the present invention.

Modification by Surface Covalent Conjugation

The general process for producing a biomaterial modified by surface covalent conjugation with at least

05580007-0526000

one non-proteinaceous catalyst for the dismutation of superoxide or at least one precursor ligand of a non-proteinaceous catalyst for the dismutation of superoxide, comprises:

- 5 a. providing at least one reactive functional group on a surface of the biomaterial to be modified;
- b. providing at least one complementary reactive functional group on the non-proteinaceous catalyst for the dismutation of superoxide or
10 on the precursor ligand; and
- c. conjugating the non-proteinaceous catalyst for the dismutation of superoxide or the precursor
15 ligand with the surface of the biomaterial through at least one covalent bond.

This process may be effected by a photo-chemical reaction, or any of a number of conjugating reactions known in the art, such as condensation, esterification, oxidative, exchange, or substitution reactions.

- 20 Preferred conjugation reactions for use in the present invention do not involve extreme reaction conditions, such as a temperature above about 375°C, or pH less than about 4. In addition, it is preferred that the conjugation reaction not produce a covalent bond that is
25 readily cleaved by common enzymes found in biological systems. Usually, it is desirable for the non-proteinaceous catalyst to have only one complementary functional group. However, in cases where crosslinking of the biomaterial is desired, such as in hydrogels,
30 poly-functional-group catalysts may be used. Care should be taken, however, to choose functional groups which will not allow the non-proteinaceous catalyst to self-polymerize, as this will decrease the efficiency of the conjugation reaction. Likewise, multiple non-

00550007.052600

proteinaceous catalysts may be used to modify the biomaterial, although complementary functional groups which allow avoid inter-catalyst conjugations would not be preferred.

- 5 The non-proteinaceous catalyst for the dismutation of superoxide or the precursor ligand may be covalently bound directly to the surface of the biomaterial, or bound to the surface through a linker molecule. Where the non-proteinaceous catalyst and the surface of the
- 10 biomaterial are directly conjugated, the reactive functional group and the complementary reactive functional group will form a covalent bond in the conjugation reaction. For instance,
- 15 poly(ethyleneterephthalate) may be hydrolyzed to carboxyl functional groups. Compound 43 may then be reacted with the derivatized polymer to form the amide bond, as illustrated in Example 7. Examples H and E also illustrate a direct surface covalent conjugation.
- 20 Further suggestions for reactive groups to use in of direct conjugation may be found in U.S. Pat. No. 5,830,539, herein incorporated by reference. Several exemplary paired functional groups are given in Table 2:

00550007.052500

TABLE 2

Non-proteinaceous Catalyst (SODm) Group	Substrate (R) Group	Resulting Linkage
SODm—NH ₂	$R-N=C=O$	$\begin{array}{c} H & O & H \\ & & \\ R-N-C-N-SODm \end{array}$
SODm—NH ₂	$\begin{array}{c} O \\ \\ R-C-OH \end{array}$	$\begin{array}{c} O & H \\ & \\ R-C-N-SODm \end{array}$
SODm—NH ₂	$\begin{array}{c} O \\ \\ R-C-X \end{array}$ (X=Cl, F, Br, I)	$\begin{array}{c} O & H \\ & \\ R-C-N-SODm \end{array}$
SODm—NH ₂	$\begin{array}{c} O \\ \\ R-C-H \end{array}$	$R-CH=NH-SODm$
SODm—NH ₂	$\begin{array}{c} O \\ \diagup \quad \diagdown \\ R-CH-CH_2 \end{array}$	$\begin{array}{c} H \\ \\ R-CH-CH_2-N-SODm \\ \\ OH \end{array}$

5

009250 2009550

SODm—NH ₂	$R-N=C=S$	$\begin{array}{c} \text{H} \quad \text{S} \quad \text{H} \\ \quad \quad \\ R-N-C-N-SODm \end{array}$
SODm—OH	$R-N=C=O$	$\begin{array}{c} \text{H} \quad \text{O} \\ \quad \\ R-N-C-O-SODm \end{array}$
SODm—OH	$\begin{array}{c} \text{O} \\ \\ R-C-OH \end{array}$	$\begin{array}{c} \text{O} \\ \\ R-C-O-SODm \end{array}$
SODm—OH	$\begin{array}{c} \text{O} \\ \diagup \quad \diagdown \\ R-CH-CH_2 \end{array}$	$\begin{array}{c} \text{OH} \\ \\ R-CH-CH_2-O-SODm \end{array}$
SODm—OH	$R-N=C=S$	$\begin{array}{c} \text{H} \quad \text{S} \\ \quad \\ R-N-C-O-SODm \end{array}$
SODm—OH	$\begin{array}{c} \text{O} \\ \\ R-C-X \end{array}$	$\begin{array}{c} \text{O} \\ \\ R-C-O-SODm \end{array}$
SODm—OH	$R-Si-(OCH_3)_3$	$R-Si-(O-SODm)_3$

05580007-053500

$\text{SODm}-\overset{\text{O}}{\parallel}{\text{C}}-\text{OH}$	$\text{R}-\text{OH}$	$\text{R}-\text{O}-\overset{\text{O}}{\parallel}{\text{C}}-\text{SODm}$
$\text{SODm}-\overset{\text{O}}{\parallel}{\text{C}}-\text{OH}$	$\text{R}-\text{N}=\text{C}=\text{O}$	$\text{R}-\overset{\text{H}}{\underset{ }{\text{N}}}-\overset{\text{O}}{\parallel}{\text{C}}-\text{O}-\text{SODm}$
$\text{SODm}-\overset{\text{O}}{\parallel}{\text{C}}-\text{OH}$	$\text{R}-\overset{\text{O}}{\parallel}{\text{C}}-\text{X}$	$\text{R}-\overset{\text{O}}{\parallel}{\text{C}}-\text{O}-\overset{\text{O}}{\parallel}{\text{C}}-\text{SODm}$
$\text{SODm}-\overset{\text{O}}{\parallel}{\text{C}}-\text{OH}$	$\text{R}-\text{CH}-\overset{\text{O}}{\triangle}-\text{CH}_2$	$\text{R}-\overset{\text{OH}}{\underset{ }{\text{CH}}}-\text{CH}_2-\text{O}-\overset{\text{O}}{\parallel}{\text{C}}-\text{SODm}$
$\text{SODm}-\overset{\text{O}}{\parallel}{\text{C}}-\text{OH}$	$\text{R}-\text{NH}_2$	$\text{R}-\overset{\text{H}}{\underset{ }{\text{N}}}-\overset{\text{O}}{\parallel}{\text{C}}-\text{O}-\text{SODm}$

When a linker molecule is used, the above process further comprises providing at least one linker capable of reacting with both the reactive functional group on a surface of the biomaterial to be modified and the complementary reactive functional group on the non-proteinaceous catalyst for the dismutation of superoxide or the precursor ligand. During the conjugation

process, the reactive functional group on the surface of the article and the complementary reactive functional group on the non-proteinaceous catalyst for the dismutation of superoxide form a covalent bond with the linker. This process may occur all in one step, or in a series of steps. For instance, in a two step process, a carboxyl functionalized polymer, such as a hydrolyzed poly(ethyleneterephthalate) polymer ("PET") could first be reacted with a (Gly)₁₂ linker in an amide reaction. Then, after removal of excess linker, the PET- glycine linker could react with an amino PACPeD such as Compound 43 to form a polymer-glycine linker-Compound 43 modified biomaterial. Alternately, the hydrolyzed PET could be linked with a low molecular weight PEG to a carboxyl PACPeD such as Compound 52 by an ester reaction in a single step. Linkers suitable for use in this process include polysaccharides, polyalkylene glycols, polypeptides, polyaldehydes, and silyl groups. Silyl groups are particularly useful in conjugating non-proteinaceous catalysts with metal biomaterials. Examples of linkers and functional groups which are useful in the present invention may be found in U.S. Pat. Nos. 5,877,263 and 5,861,032. Persons of ordinary skill in the chemical arts will be able to determine an appropriate linker and non-proteinaceous catalyst for conjugation to any biomaterial, including metals, ceramics, polymers, biopolymers, and various phases of composites.

This method of modification may be used with an article which is already in its final form, or may be used with parts of an article before final assembly. In addition, this method is useful for modifying thin stock materials which will be used in the later manufacture of a device, such as polymer or chitosan films, or fibers

009250 2009550

which will be woven into fabrics for vascular grafts. This method is also useful for modifying diverse materials in a single step with one non-proteinaceous catalyst. For instance, a tantalum component which has
5 been reacted with a silyl linker, as in Example 13, and a poly(ethyleneterephthalate) component which has been hydrolyzed, as in Example 7, may be assembled into a final device. Then, Compound 43 could be reacted with the entire article to modify the surface of both
10 materials in a single step.

Modification by Copolymerization

Biomaterials may also be modified according to the present invention by co-polymerization with a non-proteinaceous catalyst for the dismutation of superoxide
15 or the ligand precursor of a non-proteinaceous catalyst for the dismutation of superoxide. This process, in general, comprises:

- a. providing at least one monomer;
- b. providing at least one least one non-proteinaceous catalyst for the dismutation of
20 superoxide or at least one ligand precursor of a non-proteinaceous catalyst for the dismutation of superoxide containing at least one functional group capable of reaction with the monomer and also containing at least one
25 functional group capable of propagation of the polymerization reaction,
- c. copolymerizing the monomers and the non-proteinaceous catalyst for the dismutation of
30 superoxide or the ligand precursor in a polymerization reaction.

The copolymerization technique is advantageous for the modification of polymers and synthetic biopolymers

09560007 05260000

with non-proteinaceous catalysts for the dismutation of superoxide. However, it is preferred that this method be used with polymers whose polymerization reaction occurs at temperatures less than about 375°C, and pH greater than about 4. If the polymerization reaction is carried out at a pH less than 4, a ligand precursor of the non-proteinaceous catalysts for the dismutation of superoxide should be used. Monomers useful in this process include alkylenes, vinyls, vinyl halides, vinylidenes, diacids, acid amines, diols, alcohol acids, alcohol amines, diamines, ureas, urethanes, phthalates, carbonic acids, orthoesters, esteramines, siloxanes, phosphazenes, olefins, alkylene halides, alkylene oxides, acrylic acids, sulfones, anhydrides, acrylonitriles, saccharides, and amino acids.

As demonstrated previously, the non-proteinaceous catalysts for the dismutation of superoxide used in the present invention may be synthesized with any functional group necessary to react with the any of these monomers. In order to prevent the termination of the polymerization reaction, it is necessary that the non-proteinaceous catalyst also contain a polymerization propagation functional group. Often, this will be another functional group identical to the first functional group, as in the diamine PACPeD Compound 16. This catalyst is copolymerized with polyureaurethane in Example 16. However, as when the polymerization reaction involves a vinyl reaction, the reactive and propagative functional groups may be the same, such as in the acryloyl derivatized Compound 53. Copolymerization of this catalyst with acrylic or methacrylic is shown in Example 17. Example 18 also illustrates the modification of biomaterials by copolymerization with non-proteinaceous catalysts.

05580007-052500

Biomaterials modified by copolymerization have several advantages. First, the non-proteinaceous catalysts for the dismutation of superoxide are covalently bound to the modified biomaterial, preventing dissociation of the catalysts and a loss of function. Second, the modification of the material is continuous throughout the biomaterial, allowing for continuous protection by the catalyst if the exterior surface of the material is by mechanical or chemical degradation. Third, the material can be melted and re-formed into any useful article after modification, provided that the polymer melts below about 375°C. Alternatively, wet-spinning or solvent casting may be used to make articles from these modified polymer biomaterials. These characteristics make the modified polymer biomaterials produced by this process a versatile tool for various medical device applications.

Modification by Admixture

The biomaterials of the present invention may also be modified by admixture with at least one non-proteinaceous catalyst for the dismutation of superoxide or a precursor ligand of a non-proteinaceous catalyst for the dismutation of superoxide. The general process comprises:

- a. providing at least one unmodified biomaterial;
- b. providing at least one non-proteinaceous catalyst for the dismutation of superoxide or at least one ligand precursor of a non-proteinaceous catalyst for the dismutation of superoxide; and
- c. admixing the unmodified biomaterial and the non-proteinaceous catalyst for the dismutation of superoxide or the ligand precursor.

Biomaterials modified according to this process preferably form a solution with the non-proteinaceous catalyst or ligand, although a μm to nm-sized particle mixture is also contemplated by the present invention.

5 The above admixture process may involve heating the constituents in order to melt at least one unmodified biomaterial constituent. For instance, the PACPeD catalyst Compound 38 can be mixed with melted polypropylene at 250°C , as in Example 20. Many other
10 polymer biomaterials melt below 300°C , such as polyethylene, poly(ethyleneterephthalate) and polyamides, and would be especially suitable for use in this melted admixture technique. After admixing, the melted modified biomaterial may be injection or extrusion molded, or
15 spun. Temperatures above about 375°C should not be used, however, as decomposition of the catalyst may result.

Thus, metals, ceramics, and high-melt polymers should not be melted for admixture. Rather, a solvent in which at least one unmodified biomaterial and the non-
20 proteinaceous catalyst for the dismutation of superoxide or the ligand precursor are soluble may be used when admixing these constituents. As noted above, the PACPeD catalysts are soluble in several common solvents. If the solvent method is used, the process preferably further
25 comprises removing the solvent after admixing. Methods suitable for removing a solvent used in the present invention include evaporation and membrane filtration, although care should be taken so that the membrane filter size will retain the non-proteinaceous catalyst. As with
30 the copolymerized modified biomaterials, the admixed modified biomaterials may be wet spun or solution cast.

More hydrophobic or hydrophilic groups may be added to the non-proteinaceous catalyst in order to change its solubility characteristics. Likewise, the non-

09560007-052600

proteinaceous catalysts may be synthesized with specific pendant groups in order to have a particular affinity for the modified biomaterial. Usually this is accomplished by choosing the non-proteinaceous catalyst used in the admixture process so that ionic or hydrophobic interactions will occur between the catalysts and the modified biomaterial. For instance, the negatively charged carboxyl group of Compound 52 would have an affinity for the positively charged calcium ions in a hydroxyapatite ceramic matrix. Similarly, the added cyclohexyl group of Compound 47, as well as the lack of pendant polar groups, would help this catalyst to integrate into polyethylene. Thus, by increasing the affinity of the non-proteinaceous catalyst for the biomaterial, one can help to prevent the dissociation of the catalyst from the modified biomaterial.

Uses of the Modified Biomaterials

The biomaterials of the present invention show greatly improved durability and decreased inflammatory response when interacting with biological systems. Thus, these biomaterials modified with non-proteinaceous catalysts for the dismutation of superoxide are ideal for use in devices for implantation or the handling of bodily fluids. Since the non-proteinaceous catalysts for the dismutation of superoxide are not consumed during the dismutation reaction, they may retain their activity indefinitely. The biocompatible article can be an article where, during its intended use, at least a portion of the article comprising the modified biomaterial is implanted within a mammal. For instance, one such application would be coating pacemaker lead wires as described in U.S. Pat. No. 5,851,227 with the modified polyureaurethane of Example 16. These improved lead

05500007-052500
wires are believed to be more durable in the body, and thus prevent the device failure which is often seen with conventional polyurethane coated wires. Similarly, a modified polyester, such as in Example 19, could be used to spin fibers for vascular graft fabric as described in U.S. Pat. No. 5,824,047. Grafts made using this fabric are believed to heal faster, as less inflammation would be caused by the biomaterial. Similarly, the modified polypropylene tested in Example 22 could be used to make surgical sutures. The biocompatible article may also be one where, during its intended use, the surface comprising the modified biomaterial is exposed to biological fluids, such as blood or lymph. For instance, a surface covalently conjugated chitosan film would be ideal for use as a membrane material in heart-lung machines which oxygenate and circulate blood during bypass operations. The copolymerized poly(etherurethane urea) of Example 16 would be useful in manufacturing the direct mechanical bi-ventricular cardiac assist device of U.S. Pat. No. 5,749,839. Use of these biomaterials in tissue engineering devices, such as scaffoldings, would be another application.

The various methods of modifying biomaterials provided by the invention allow for a wide range of practical applications. For instance, in manufacturing stents for use in angioplasty procedures, one would have the option of directly conjugating a PACPeD with a pendant silyl group with the steel of a stent manufactured as described in U.S. Pat. No. 5,800,456, through the formation of a covalent bond. Alternatively, one could copolymerize a PACPeD with pendant amine groups with a polyurethane, as in Example 16, and coat the stent with the polymer. Yet another option would be to admix a PACPeD with polypropylene, as in Example 20, extrude the

05580007-0526000

mixture into a stretchable film, and shrink wrap the stent in the modified polymer film. As shown by this simple example, the diverse processes for the production of modified biomaterials using non-proteinaceous catalysts for the dismutation of superoxide allow the bio-engineer a wide variety of manufacturing techniques. A person of ordinary skill in the art of medical device design would be able to discern which modified material, and which process of modification, would be best for the medical device being produced.

The biocompatible articles of the present invention may comprise several biomaterials modified with a non-proteinaceous catalyst for the dismutation of superoxide or a ligand precursor of a non-proteinaceous catalyst for the dismutation of superoxide. This versatility will make these materials especially useful in medical devices that are subject to continual wear and stress, such as joint replacement implants. The polyethylene "socket" polymer portion of the joint which allows a lowered friction contact point in the implant could be injection molded from a copolymer with the non-proteinaceous catalyst, while the metal "ball" portion of the joint which contacts the polyethylene could be surface covalently conjugated with a non-proteinaceous catalyst. Thus, an entire device with decreased inflammatory response may be manufactured out of the modified biomaterials of the present invention, even though diverse materials are used in its construction. Another use for the modified biomaterials, mentioned in the stent example above, is coatings.

The chemical reactions described above are generally disclosed in terms of their broadest application to the preparation of the compounds of this invention. Occasionally, the reactions may not be applicable as

described to each compound included within the disclosed scope. The compounds for which this occurs will be readily recognized by those skilled in the art. In all such cases, either the reactions can be successfully performed by conventional modifications known to those skilled in the art, e.g., by appropriate protection of interfering groups, by changing to alternative conventional reagents, by routine modification of reaction conditions, and the like, or other reactions disclosed herein or otherwise conventional, will be applicable to the preparation of the corresponding compounds of this invention. In all preparative methods, all starting materials are known or readily prepared from known starting materials.

Without further elaboration, it is believed that one skilled in the art can, using the preceding description, utilize the present invention to its fullest extent. The following preferred specific embodiments are, therefore, to be construed as merely illustrative, and do not limit of the remainder of the disclosure in any way whatsoever.

EXAMPLES

All reagents were used as received without purification unless otherwise indicated. All NMR spectra were obtained on a Varian VXR-300 or VXR-400 nuclear magnetic resonance spectrometer. Qualitative and quantitative mass spectroscopy was run on a Finnigan MAT90, a Finnigan 4500 and a VG40-250T using m-nitrobenzyl alcohol (NBA) or m-nitrobenzyl alcohol/LiCl (NBA+Li). Melting points (mp) are uncorrected.

EXAMPLE 1

PREPARATION OF COMPOUNDS USED IN TEMPLATE SYNTHESIS

Chemicals, Solvents, and Materials. UV Grade

Acetonitrile (015-4) and Water (AH365-4) were obtained
5 from Burdick & Jackson (Muskegon, MI). Isopropanol
(27,049-0), R,R-1,2-diaminocyclohexane (34,672-1), 2,6-
diacetylpyridine (D880-1), 2,6-pyridinedicarboxaldehyde
(25,600-5), and trifluoroacetic acid (T6508) were
purchased from Aldrich (Milwaukee, WI). 2-(N-
10 morpholino)-ethanesulfonic acid (475893) and its sodium
salt (475894) were purchased from Calbiochem (La Jolla,
CA).

N-(triphenylmethyl)-(1R, 2R)-diaminocyclohexane:

To a solution of (1R,2R)-diaminocyclohexane (250 g, 2.19
15 mol) in anhydrous CH₂Cl₂ (3.5 L) at 0 °C was added,
dropwise, a solution of trityl chloride (254 g, 912 mol)
in anhydrous CH₂Cl₂ (2 L) over 4 h. The resulting
mixture was allowed to warm to RT and stirred overnight.
The reaction mixture was washed with water until the pH
20 of the aqueous washes was below 8 (4 x 2 L) and dried
over Na₂SO₄. Filtration and concentration of the solvent
afforded 322.5g (99% yield) of N-(triphenylmethyl)-(1R,
2R)-diaminocyclohexane as a glass: ¹H NMR (300 MHz,
DMSO-d₆) δ 7.50 (d, J = 7.45 Hz, 6 H), 7.26 (app t, J =
25 7.45 Hz, 6 H), 7.16 (app t, J = 7.25 Hz, 3 H), 2.41 (dt,
J = 10.3, 2.62 Hz, 1 H), 1.70 (m, 1 H), 1.54 - 0.60
(complex m, 8 H). ¹³C NMR (75 MHz, DMSO-d₆) δ 147.2
(s), 128.4 (d), 127.3 (d), 69.9 (s), 59.0 (d), 54.4 (d),
36.6 (t), 32.5 (t), 24.6 (t), 24.3 (t). MS (LRFAB) m/z =
30 363 [M + Li]⁺.

Glyoxal bisimine of N-(triphenylmethyl)-(1R, 2R)-
diaminocyclohexane: To a solution of N-(triphenylmethyl)-
(1R, 2R)-diaminocyclohexane (322.5 g, 905 mmol) in

009250 2099550

methanol (4 L) was added glyoxal (51.9 ml of a 40 % solution in water, 452.3 mmol), dropwise over 30 min. The resulting mixture was stirred for 16 h thereafter. The precipitated product was isolated by filtration and dried in vacuo to afford 322.1 g (97 % yield) of the bisimine product as a white solid: ¹H NMR (300 MHz, CDCl₃) δ 7.87 (s, 2 H), 7.51 (d, J = 8.1 Hz, 12 H), 7.16 - 7.05 (m, 18 H), 2.95 (b m, 2 H), 2.42 (b m, 2 H), 1.98 - 0.81 (complex m, 18 H). ¹³C NMR (100 MHz, CDCl₃) 161.67 (d), 147.24 (s), 147.22 (s), 128.90 (d), 128.81 (d), 127.73 (d), 127.61 (d), 126.14 (d), 73.66 (s), 70.86 (d), 70.84 (d), 56.74 (d), 32.45 (t), 31.77 (t), 24.02 (t), 23.62 (t). MS (LRES) m/z 757 [M + Na]⁺.

N,N'-Bis{(1R,2R)-[2-(Triphenylmethylamino)]cyclohexyl}-1,2-diaminoethane:
The glyoxal bisimine of N-(triphenylmethyl)-(1R,2R)-diaminocyclohexane (586 g, 798 mmol) was dissolved in THF (6 L) and treated with LiBH₄ (86.9 g, 4.00 mol) at RT. The mixture was stirred for 12 h at RT and treated with a second 86.9 g (4.00 mol) portion of LiBH₄. The reaction was then warmed to 40 °C for 4 h thereafter. The reaction was carefully quenched with water (1 L) and the THF was removed under reduced pressure. The residual slurry was partitioned between CH₂Cl₂ (3 L) and water (1 additional L). The layers were separated and the aqueous layer was extracted again with CH₂Cl₂ (1 L). The combined CH₂Cl₂ extracts were dried (MgSO₄), filtered and concentrated to afford 590 g (~100 % crude yield) of N,N'-bis{(1R,2R)-[2-(triphenylmethylamino)]cyclohexyl}-1,2-diaminoethane as a white foam: MS (LRES) m/z 739 [M + H]⁺.

N,N'-Bis{(1R,2R)-[2-(amino)]cyclohexyl}-1,2-diaminoethane tetrahydrochloride: To a solution of N,N'-bis{(1R,2R)-[2-(triphenylmethylamino)]cyclohexyl}-1,2-

009250-00000000

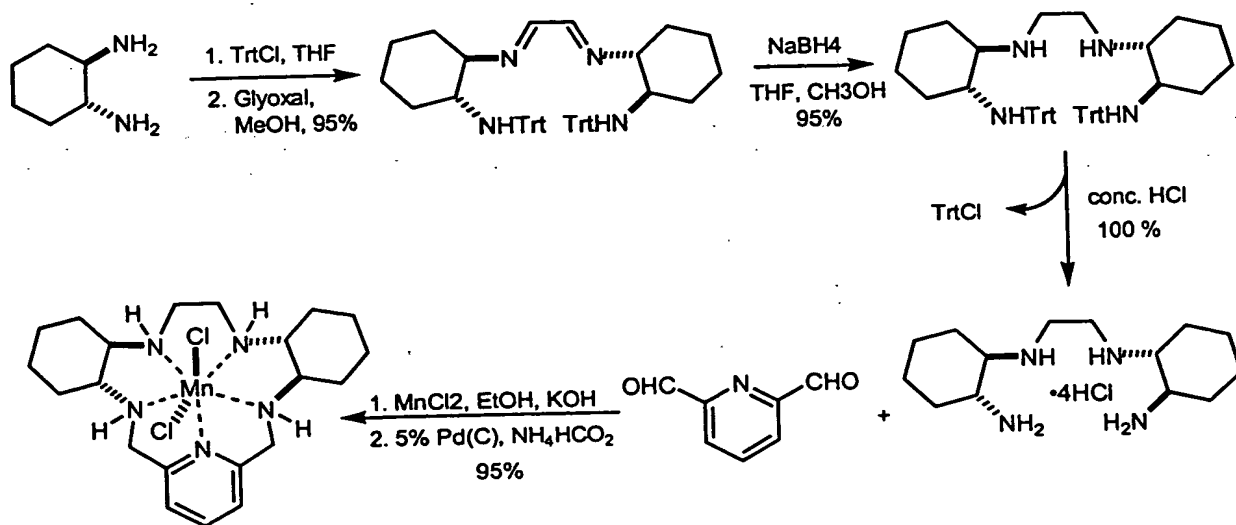
[illegible]

TEMPLATE SYNTHESIS OF COMPOUND 38

[Manganese (II) dichloro{(4R,9R,14R,19R)-
3,10,13,20,26-pentaazatetracyclo
[20.3.1.04,9.014,19]hexacos-1(26),22(23),24-triene}].
In a 5-L flask N,N'-Bis {(1R,2R)-[2-(amino)]cyclohexyl}-
1,2-diaminoethane tetrahydrochloride, (93.5 g, 234 mmol),
was suspended in ethanol (3 L), treated with solid KOH
(59.6 g of 88% material, 934 mmol), and the resultant
mixture stirred at RT for 1 h. MnCl₂ (anhydrous, 29.4 g,
233.5 mmol) was then added in one portion and the
reaction was stirred at RT for 15 min. To this
suspension was added 2,6-pyridinedicarboxaldehyde (31.6
g, 233.5 mmol) and the resulting mixture was refluxed
overnight. After 16h, the template reaction was complete:
MS (LRFAB) m/z 443 [M - Cl]⁺. See accompanying HPLC

analyses. This material was taken on to the next step "as is". The reaction mixture containing the template product in ethanol was cooled to RT and treated (cautiously under Argon flow) with 10 % Pd(C) (~100 g in portions over the next 3-4 days) and ammonium formate (~200 g also in portions over the next 3-4 days). The reaction was refluxed for 4 days. HPLC and MS analysis at this time showed complete reduction. The catalyst was filtered through celite and the filtrate was concentrated to afford ca. 110 g of crude material. Recrystallization from water afforded 50.0 g of the product in crop one as a pale yellow finely divided solid. Upon sitting a second crop (12.5 g) was isolated. MS (LRFAB) m/z 447 [M - Cl]⁺. After drying the combined crops overnight in vacuo at 70°C, a yield of 60.1 g (54%) was obtained. Analysis calc'd for C₂₁H₃₅Cl₂N₅Mn: C, 52.18; H, 7.30; N, 14.49; Cl, 14.67. Found: C, 51.89; H, 7.35; N, 14.26; Cl, 14.55.

The synthesis is diagramed below:



EXAMPLE 3
TEMPLATE SYNTHESIS OF COMPOUND 40

[Manganese(II)dichloro(4R,9R,11R,14R,19R)-
3,10,13,20,26-pentaaza-(2R,21R)-
5 dimethyltetracyclo[20.3.1.0^{4,9}.0^{14,19}]hexacose-
1(25),22(26),23-triene, To a stirred solution of N,N'-
Bis{(1R,2R)-[2-(amino)]cyclohexyl}-1,2-diaminoethane
tetrahydrochloride (4.00 g, 10.0 mmol) in absolute
ethanol (100 mL) was added KOH (2.55 g of ~88% material,
10 40.0 mmol) and the mixture was stirred at RT for 30 min.
under an Ar atmosphere. MnCl₂ (anhydrous, 1.26 g, 10.0
mmol) was then added and the suspension stirred for an
additional 30 min. or until MnCl₂ dissolved. At this
point, 2,6-diacetylpyridine (1.63 g, 10.0 mmol) was
15 added to the green mixture and after 30 minutes heating
commenced. After refluxing for 5 d, the mixture was dark
red-brown. Mass spectrometry and HPLC analyses showed
that the reaction had gone to ~95% completion to give the
bisimine Mn(II) complex (~94% purity by HPLC): ESI-MS:
20 m/z (relative intensity) 471/473 (100/32) [M - Cl]⁺; only
traces of diacetylpyridine (~5% by HPLC) and unreacted
tetraamine complex (MS) were detected. The suspension was
allowed to cool to RT, and was stirred overnight. The
next day, the suspension was filtered (largely KCl) and
25 dried in vacuo at 70 °C overnight. This material may be
further purified by extractive work-up as follows: 69 g
of the crude bisimine were dissolved in 1.2 L of
distilled water. The yellow-orange solution was extracted
with CH₂Cl₂ (4 x 500 mL) and then 210 g of NaCl were added
30 (final solution is ~15% w/v in NaCl). The resulting
suspension was extracted with CH₂Cl₂ (4 x 500 mL). The
combined extracts were pooled, dried over MgSO₄, filtered,
and the solvent removed under reduced pressure. Upon

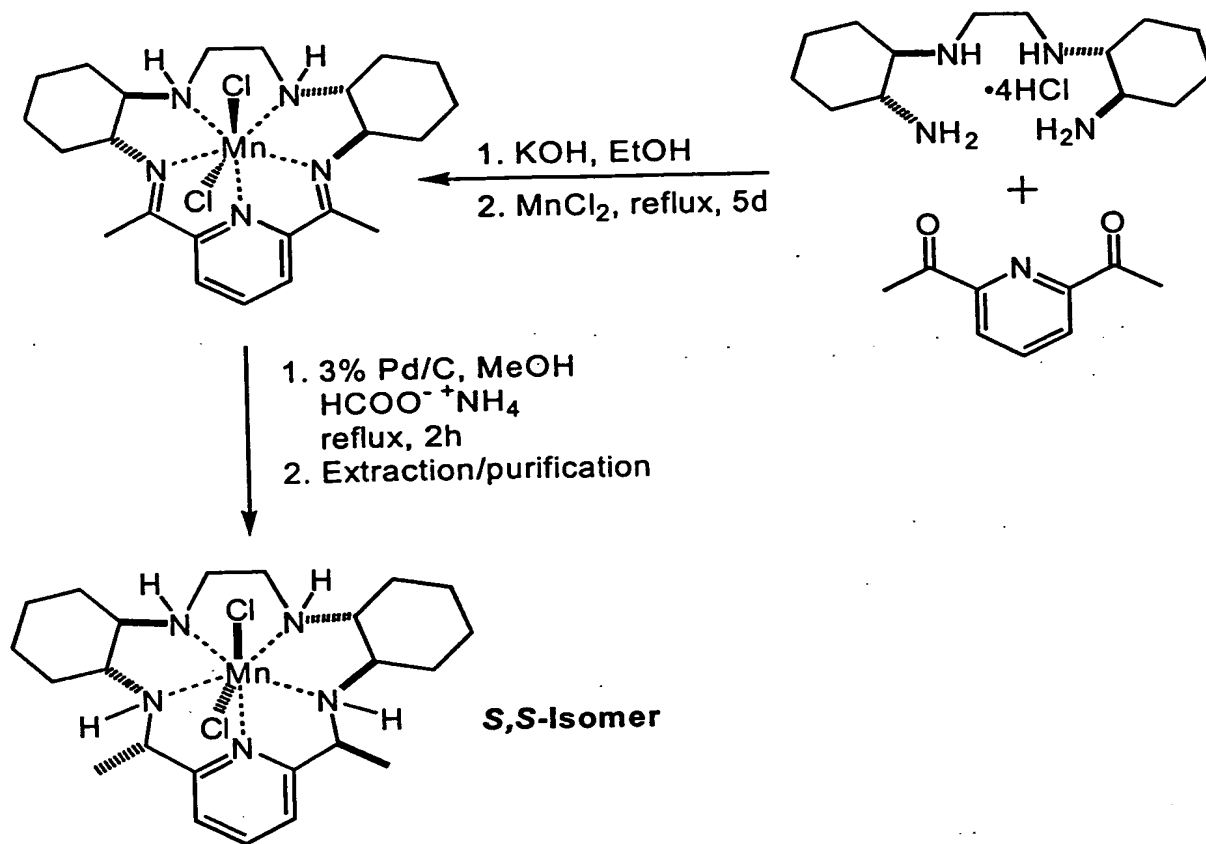
0526007.052600

drying in vacuo at 70 °C overnight, the product was isolated as an amorphous orange solid (ca. 50g, 78% recovery) with a purity of ca. 98% by HPLC.

Transfer hydrogenation with ammonium formate.

5 The purified bisimine (1.0 g, 1.97 mmol) was dissolved in 100 mL of anhydrous MeOH and the flask flushed with nitrogen while 3% Pd/C (0.5 g, 50% by weight) was added. The suspension was heated and 10 mL of a MeOH solution containing ammonium formate (1g, 16 mmol) were added. After 30 and 60 min. of reflux, a second and third portion of formate were added (16 mmol each). The suspension was allowed to cool to RT after 2h of reflux (at this point the supernatant was nearly colorless), filtered through celite and the solvent removed under reduced pressure. The resulting yellow-green semisolid was stirred with 50 mL of CH₂Cl₂ for 5-10 min., filtered, and the solvent removed once more. The remaining yellow-green foam consisted of ~95% S,S- and S,R-isomers in a 3.8:1 ratio as determined by HPLC.

20 The synthesis is diagramed below:



Purification protocol.

Extraction of Compound 40 (S,S-isomer) from the crude mixture obtained from transfer hydrogenation.

- Crude product isolated after transfer hydrogenation
- 5 (9.3 g) was dissolved in water (370 ml) and extracted with DCM (4 x 185 ml). All organic extracts and aqueous phase were analyzed by HPLC to follow the progress of extraction. Analysis was performed either in a complex form or after release of the free ligand. Recovery of
- 10 R,S- and S,S-isomer from DCM (1+4, extracts from water): (2.42g +1.18g+1.24g = 4.84 g). After 4 extraction with DCM no R,S-isomer was detected by HPLC in aqueous phase. Then solid NaCl was added (10.82 g) to make up 0.5 M solution and S,S-complex (Compound 40) was extracted 4

times with DCM (370 ml each). Most of the S,S-isomer was extracted into the 1st DCM extract (purity by HPLC>94%). Impurities (others than R,S-isomer) were extracted at 4-6 % level). After evaporaion of the first two DCM extracts and drying under high vacuum , 3.04g of S,S-isomer Compound 40 was obtained with purity 94%. The product was further purified by HPLC using YMC C18 column or by flash chromatography over C18 silica gel column.

10 Purification by preparative HPLC

Compound 40 (200 mg) obtained from extraction (purity 91 %) was dissolved in water (1.0 ml) and applied onto YMC CombiPrep column (20mm x 50mm, ODS AQ 5um 120A). The product was eluted using gradient - B 10 to 50 % in 10 min, where A: 0.5M NaCl and B: Acetonitrile-Water (4:1), flow rate 25 ml/min, detection at $\lambda=265$ nm. Fractions with purity > 99% (8 to 20, each 5 ml) were combined and the solvents were evaporated to dryness. The residue was partitioned between 6 ml water and 10 ml of DCM. Separated layers, extracted aqueous layer with 3 x 10ml DCM. Combined DCM layers, dried over Na₂SO₄, filtered and evaporated solvents to off-white foam, Obtained 97mg, 48%. ESMS m/z 475 [M-Cl]⁺ Calcd for C₂₃H₃₉Cl₂N₅Mn.

25 Purification of Compound 40 by flash chromatography over C18 silica gel

40 g of Bakerbond Octadecyl C₁₈ packing was packed into a 25 mm X 130 mm column. Column was equilibrated with CH₃CN (300 ml), 1:1=H₂O:CH₃CN (200 ml), 15% CH₃CN in H₂O (200 ml) and 15 % CH₃CN in 0.5 M NaCl (200 ml).

Compound 40 (1 g) obtained from extraction (purity 94 % by HPLC) was dissolved in 3 ml of H₂O and applied onto the column. The product was eluted with 15% CH₃CN in 0.5 M NaCl. Fractions were analyzed by HPLC. HPLC conditions were as follows: YMC C₁₈ column, 3 ml/min, λ =265 nm, B=10-50% in 9 min, where A= 0.5 M NaCl in H₂O and B= CH₃CN : H₂O=4:1. The S,S-isomer eluted in fractions 51-170. Fractions with purity > 95% (80-170) were combined and the solution was concentrated to 80 ml and extracted 2 x with DCM. (40 ml each). Obtained 0.64 g (yield 64%) of the S,S -isomer (Compound 40), 100% pure by HPLC . ESMS m/z 475 [M-Cl]⁺ Calcd for C₂₃H₃₉Cl₂N₅Mn.

EXAMPLE 4

TEMPLATE SYNTHESIS OF COMPOUND 42

15 Synthesis of 4-chloro-2,6-pyridinedicarboxaldehyde.
4-Chloro-2,6-dicarbomethoxypyridine: Anhydrous chelidamic acid (230 g, 1.14 mol) was partially dissolved in CHCl₃ (2 L) while stirring under N₂. Then, over a period of 3h, PCl₅ (1,000 g, 4.8 mol) was added as a solid to the cream-colored suspension. Considerable gas evolution occurred with each solid addition. After 17h, the white mixture was heated to reflux and a light yellow solution resulted within an hour. Seven hours later, heating was discontinued. The light suspension was treated with MeOH (1.25 L), added dropwise over 6.5h. Then, after gas evolution had ceased, the solution was concentrated under reduced pressure and the off-white slurry that formed added to deionized water and vacuum-filtered. The residue was washed with more water (~5 L) until the pH of the filtrate was neutral. The residue was dried overnight in vacuo at 50-60 °C to afford 4-chloro-2,6-dicarbomethoxypyridine as white needles (175g, 66%);

m.p. 132-134 oC. ¹H-NMR is consistent with the structure.

4-Chloro-2,6-pyridinedimethanol: The methyl ester prepared as above (675 g, 2.94 mmol) was partially dissolved in MeOH (16 L) and stirred under N₂ with cooling in an ice bath. NaBH₄ (500 g, 13.2 mol) was added as a solid in portions over the next 20h. Over the course of 48h, the reaction went from orange to red to yellow-green. Then, the temperature was allowed to reach RT overnight. After this period, the mixture was refluxed for 16h, then cooled over 6h to afford a clear yellow-green solution. Acetone (3.1 L) was added over 1.5h, then the yellow solution was refluxed for 2h. Concentration under reduced pressure yielded an amorphous light yellow gum. The gum was taken up in saturated Na₂CO₃ and heated to ~80 oC for 1h. Upon cooling overnight, the viscous yellow supernatant was separated from the white precipitate by vacuum filtration. The solid was washed with CHCl₃ (350 mL), then taken in THF (4.5 L) and refluxed for 30 min., then filtered. The filtrate was concentrated under removed pressure, the solid residue washed with CHCl₃, then dried in vacuo overnight to afford the diol product (375 g, 68%) as a white solid. ¹H-NMR is consistent with the structure.

4-Chloro-2,6-pyridinedicarboxaldehyde: A solution of oxalyl chloride (110 mL, 1.27 mol) in CH₂Cl₂ (575 mL) was cooled to -60 oC and stirred under N₂. To this solution was added a solution of dimethylsulfoxide (238 mL, 3.35 mol) in CH₂Cl₂ (575 mL) via cannula. Addition proceeded with vigorous gas evolution and a mild exothermic reaction over 1.5h. After stirring for 10 min. a solution of the diol (100 g, 0.58 mol) in DMSO (288 mL) was added via cannula over a period of 30 min. The previously yellow solution turned into a suspension. After 2h at -60 oC, Et₃N (1.5 L) was added dropwise over 1h. After

addition was complete and 30 min. had passed, the mixture was poured over water (2 L), shaken and allowed to settle. The organic layer was separated and the aqueous layer extracted with CH₂Cl₂ (4 x 300 mL). The combined
5 CH₂Cl₂ layers were dried over MgSO₄ and concentrated under reduced pressure to afford a combination of gray-yellow solid and a reddish liquid. The dark yellow solid was collected by filtration using Et₂O to rinse out. This material was dissolved in 1L of CH₂Cl₂ and passed through
10 a bed of SiO₂ (~800 cm³) eluting with more CH₂Cl₂. A total of 65 g (67%) of the dialdehyde product were collected in this fashion. ¹H-NMR is consistent with the structure.

Preparation of 4-chlorobisimine by template cyclization.

15 Bis-R,R-Cyclohexane tetraamine·4HCl (2.57g, 6.42 mmol) was suspended in absolute EtOH (64 mL) and stirred under Ar. Pellets of KOH (1.65g of 87.4% material, 25.68 mmol) were added and the suspension stirred for 30 min. until the pellets dissolved. After this period, MnCl₂
20 (anhydrous, 0.806g, 6.42 mmol) was added and allowed to stir for 1-2h until the suspension turned greenish and all the MnCl₂ dissolved. 4-Chloro-2,6-pyridinedicarboxaldehyde (1.09g, 6.42 mmol) was added as a solid and the mixture stirred at room temperature for
25 30 min., then heated to reflux. The suspension gradually turns red-orange and after 48 hours it was cooled to room temperature. The mixture was filtered through a 10m pore-size funnel and the solvent removed under reduced pressure to yield the desired product (3.47g, 105%,
30 contains some inorganic salts) as a red-orange solid.

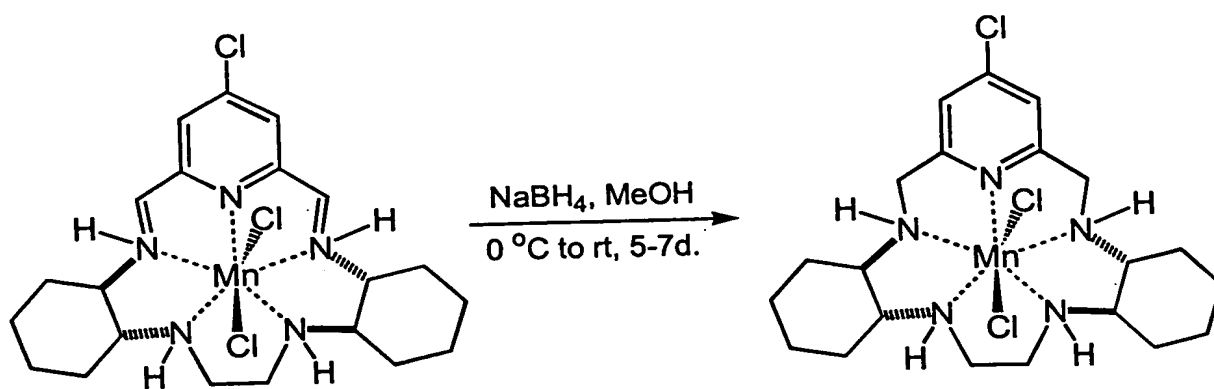
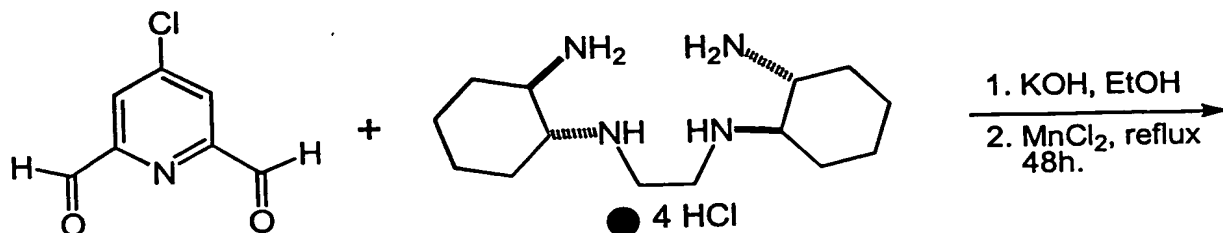
NaBH₄ Reduction.

0550007-0550000

The bis-imine complex (1.89g, 3.68 mmol) was dissolved in anhydrous MeOH (50 mL) and stirred under Ar in an ice-water bath. Solid NaBH₄ (0.278g, 7.36 mmol) was added in one portion resulting in gas evolution. After 30 min., an additional portion of NaBH₄ (7.36 mmol) was added and the mixture allowed to warm to RT, and stirred overnight. A third portion of NaBH₄ (7.36 mmol) was added at 0°C, then the mixture allowed to warm and stirred overnight. After this period, MS still showed starting material remaining. A fourth, fifth, and sixth portion of NaBH₄ (7.36 mmol each) were added with 2 hours passing in between addition.

After 24h at RT, the lightly colored solution was carefully added onto 100 mL of saturated NaCl solution, and MeOH removed under reduced pressure. CH₂Cl₂ (100 mL) was added and the aqueous layer extracted (2X). The organic layers were combined, dried over MgSO₄, filtered and the solvent removed to afford, upon drying in vacuo, 2.1 g of crude material (60% product by HPLC). This material was purified by SiO₂ flash chromatography using 1 to 3% MeOH:CH₂Cl₂ as eluent. Selected fractions yielded 0.77 g (40%) of HPLC-homogeneous material. ESI-MS: m/z (relative intensity) 481/479 (100/32) [M-Cl]⁺; and 223/221 (100/32) [M-2Cl]²⁺.

The synthesis is diagramed below:





EXAMPLE 5

SYNTHESIS OF COMPOUND 43 FROM COMPOUND 42

To a solution of 1.2 % (w/v) 2-mercaptoethylamine (1 eq) in ethanol at 0 °C was added sodium ethoxide (1.1 eq) to generate the thiolate. After stirring for 1.75 h, the thiolate solution was added dropwise to a solution of 1.3 % (w/v) SC 74897 (1 eq) in DMF at 0 °C. The reaction mixture was allowed to stir overnight. The solvent was removed in vacuo, the product mixture was extracted with methylene chloride, and concentrated down in vacuo. Flash column chromatography using methylene chloride:methanol (9:1) as the eluent was used for purification, which was monitored via HPLC.

The synthesis is illustrated below:

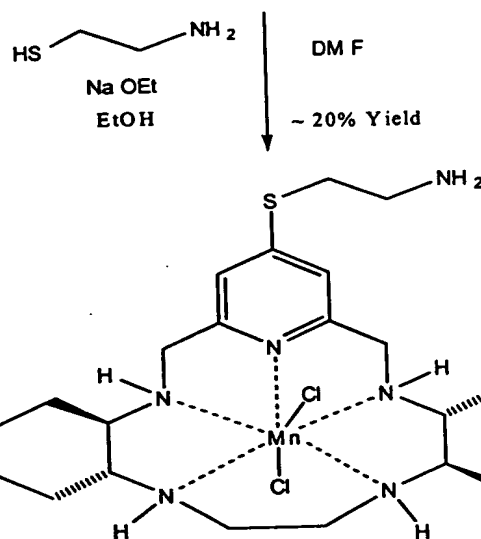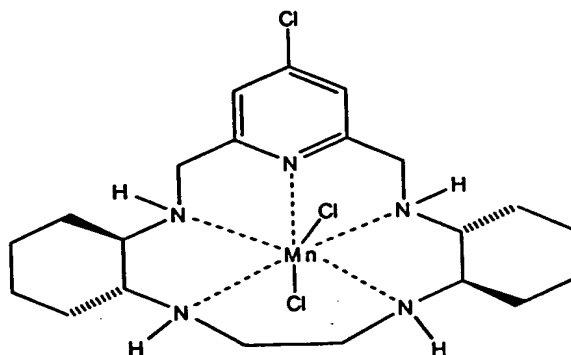009350 2009550



EXAMPLE 6

CATALYTIC HYDROGENATION OF THE BISIMINE

5

Transfer hydrogenation with ammonium formate.

The purified bisimine (1.0 g, 1.97 mmol) was dissolved in 100 mL of anhydrous MeOH and the flask flushed with nitrogen while 3% Pd/C (0.5 g, 50% by weight) was added. The suspension was heated and 10 mL of a MeOH solution containing ammonium formate (1g, 16 mmol) were added. After 30 and 60 min. of reflux, a second and

10

third portion of formate were added (16 mmol each). The suspension was allowed to cool to RT after 2h of reflux (at this point the supernatant was nearly colorless), filtered through celite and the solvent removed under reduced pressure. The resulting yellow-green semisolid was stirred with 50 mL of CH_2Cl_2 for 5-10 min., filtered, and the solvent removed once more. The remaining yellow-green foam consisted of ~95% S,S- and S,R-isomers in a 3.8:1 ratio as determined by HPLC.

09560007-052600

EPI 8311
PATENT

Hydrogen Transfer Results

Concentration (nM) ^a	Catalyst (%Pd.C) ^b	% by Weight	Time (hours)	% Area by HPLC ^d				
				Free Ligand	Mono- imine	SS- isomer	SR- isomer	Ratio
20	10	50	2	--	--	68	32	2.13
20	5	50	2	2	--	75	23	3.26
20	5	10	4	2	7	64	27	2.37
20	3	50	2	2	2	75	21	3.57
50	3	50	2	4	--	70	25	2.80
100	3	50	2	9	<1	64	26	2.46

a. Solvent is anhydrous MeOH. b. Available from Aldrich. c. Reflux time. d. Conditions:
3mL/min. 10-50% B over 9 min. is (8:2 v/v) MeCN:water, A is 0.5N aq. NaCl. UV-detection
at 265 nm.

EXAMPLE 7
CONJUGATION OF POLYETHYLENE TEREPHTHALATE
WITH A PACPeD CATALYST

A. Denier reduction (alkaline hydrolysis) of

5 Poly(ethylene terephthalate) (PET) film

20 mm X 50 mm X 5 mm PET film (37 % crystallinity) pieces were cleaned by mixing for 30 min in a 1 % (w/w) aqueous Na_2CO_3 solution (250 mL) at 75°C . The film pieces were removed and washed 30 min in water (HPLC grade, 250 mL) at 75°C . The pieces were next hydrolyzed for 30 min in a 0.5 % (w/w) aqueous NaOH solution (250 mL) at 100°C . The film pieces added to a 1.2 % (w/w) aqueous conc. HCl solution (250 mL) at room temperature. Finally, the film pieces were thoroughly rinsed in a stream of water (HPLC grade) at room temperature and dried to constant weight in vacuo.

B. Preparation of the acid chloride

A magnetic stir bar and anhydrous acetonitrile (50 mL) were added to a dry 100 mL round bottom flask. To the stirring solvent was added one piece of hydrolyzed film, pyridine (0.078 g, 9.89×10^{-4} mol), and thionyl chloride (0.167 g, 1.4×10^{-3} mol). After stirring for 24 h at room temperature, the film was removed and thoroughly rinsed in fresh acetonitrile. After drying to constant weight in vacuo, elemental analysis showed the presence of chlorine in the film.

C. Reaction with amino functional PACPeD

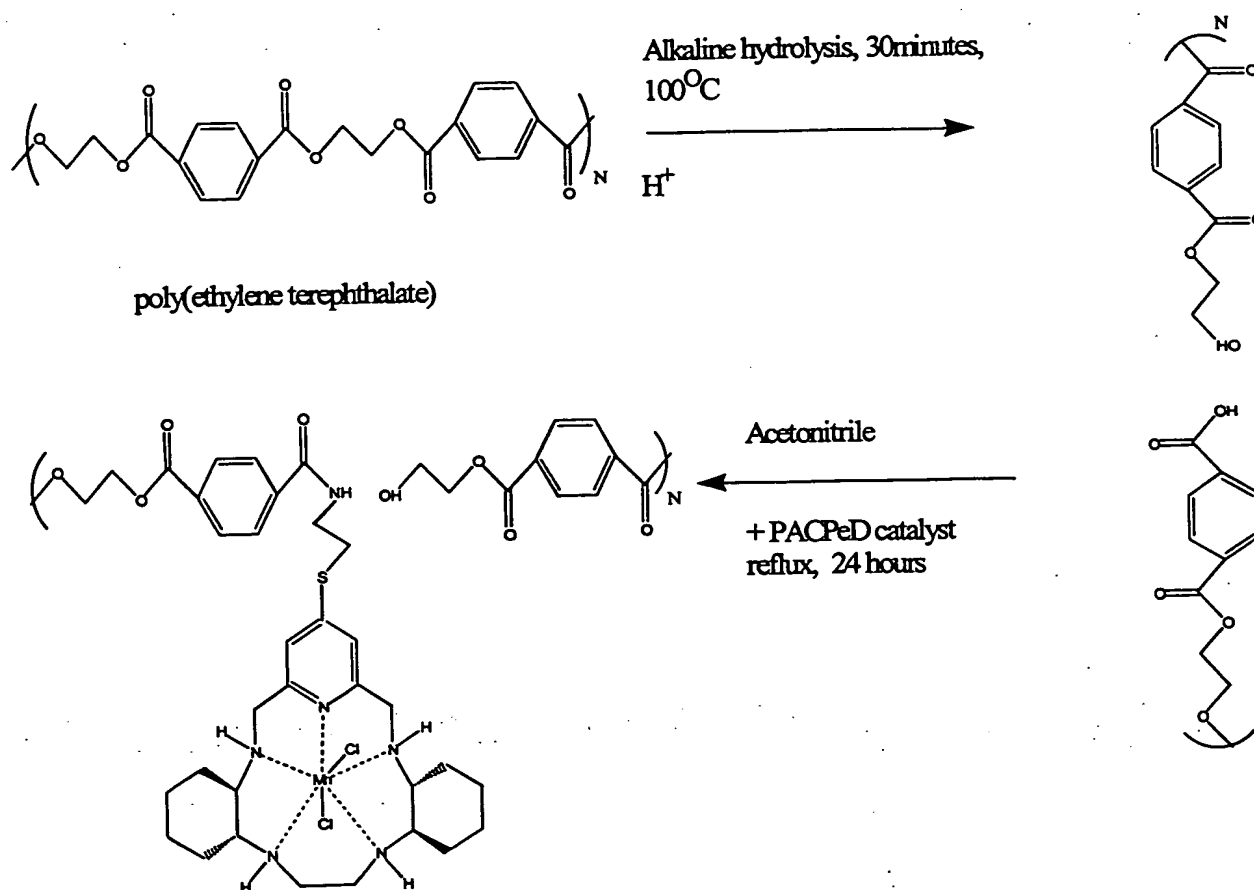
A magnetic stir bar and anhydrous acetonitrile (50 mL) were added to a dry 100 mL round bottom flask. Amino functional Compound 43 (0.138 g, 1.86×10^{-4} mol) was added. Once in solution, the film step B was added and

009250 000000

the reaction mixture was heated to reflux. After 24 h at reflux, the film was removed and rinsed in fresh acetonitrile before drying to constant weight in vacuo. ICAP analysis of the film revealed the presence of

5 manganese.

The conjugation scheme is illustrated by the following:



EXAMPLE 8

CONJUGATION OF ACRYLIC ACID MODIFIED POLYETHYLENE WITH A
PACPED CATALYSTA. Grafting of acrylic acid to PET films

5 Pieces of 20 mm X 50 mm X 5 mm PET film (37% crystallinity) were used without cleaning. Film pieces were swollen in 80°C 1,2-dichloroethane for 1 h. The films were then dried to constant weight in vacuo.

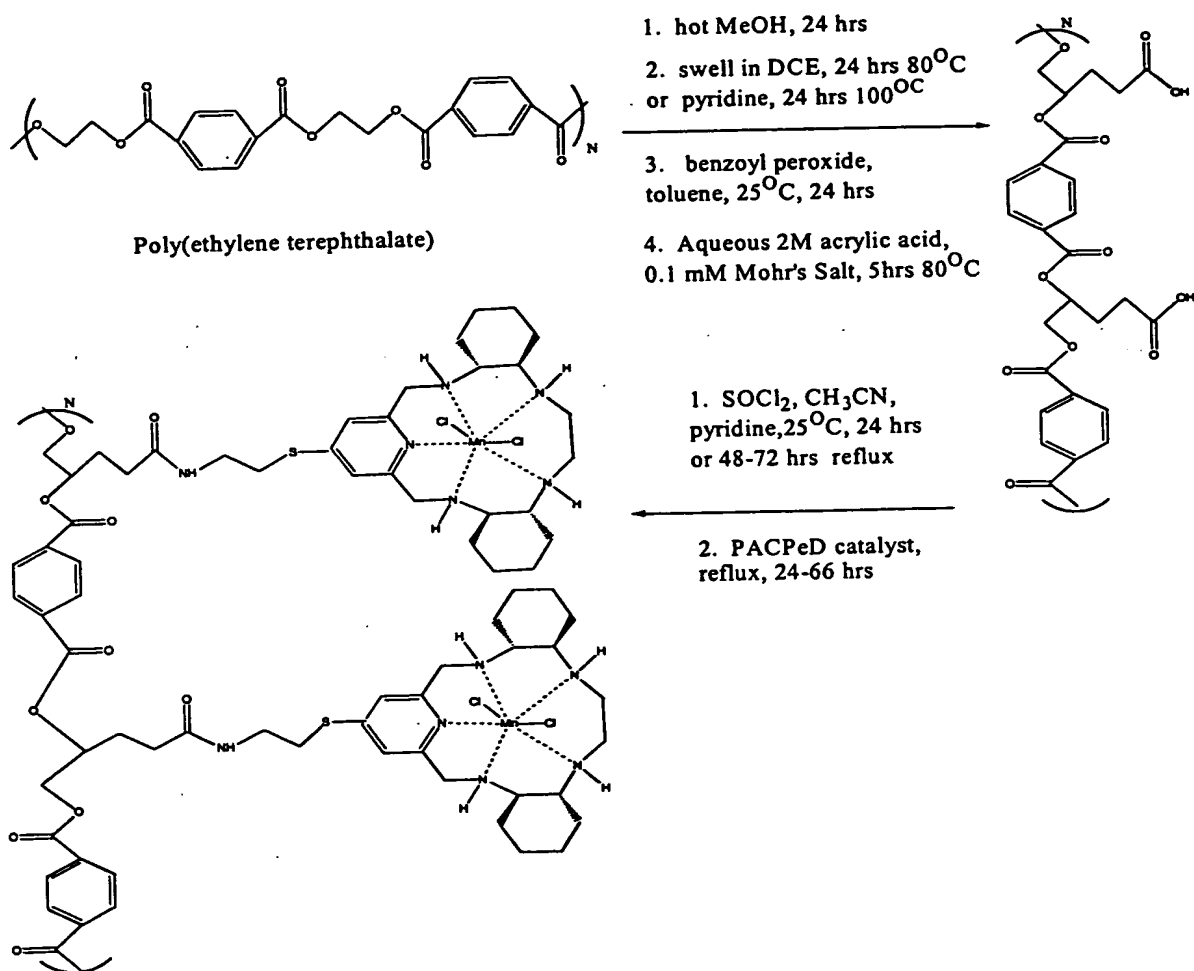
10 Swollen film pieces were added to a 0.08 M benzoyl peroxide in anhydrous toluene solution (125 mL). After mixing for 1 h at room temperature, the film pieces were removed, rinsed in fresh anhydrous toluene, and dried to constant weight in vacuo.

15 Next, the films were immersed in a 30 mL vial containing a 2 M acrylic acid (freshly distilled) and 0.1 mM Mohr's salt $\{(NH_4)_2Fe(SO_4)_2 \cdot 6 H_2O\}$ aqueous solution (25 mL). The vial was purged with nitrogen, sealed, and immersed in an 80°C oil bath. The film pieces were stirred for 20-24 h at 80°C before removal and rinsing
20 for several minutes in hot running tap water followed by a stream of room temperature water (HPLC grade). After drying overnight in vacuo, the acrylic acid grafted films were immersed for 5 h in boiling water (HPLC grade) and dried to constant weight in vacuo.

25 Preparation of the hydrolyzed PET film and conjugation with the PACPED catalyst proceeded as described in Example 7.

The conjugation scheme is illustrated by the following:

03530007.0526000



EXAMPLE 9

SURFACE COVALENT CONJUGATION OF COMPOUND 43 WITH
POLY(ETHERURETHANEUREA)

The poly(etherurethaneurea) (PEUU) ($M_n = 50,000$) used
 5 for conjugation was a segmented block copolymer
 consisting of methylene di(*p*-phenyl isocyanate) (MDI),
 ethylene diamine, and poly(tetramethyleneglycol) (PTMG, M_n

= 2000). The ethylene diamine chain extended MDI makes up the hard segment and the PTMG makes up the soft segment. PEUU films were solvent cast from a solution of 20 % PEUU in N,N-dimethylacetamide (DMAc) and allowed to dry under nitrogen for ~ 2 days. Films were further dried in vacuo before being cut into ~ 5 mm diameter disks of ~ 0.3 mm thickness.


PEUU disks were functionalized in a solution of 5.4 % (w/v) HMDI in anhydrous toluene with triethyl amine added to serve as the catalyst. The reaction was allowed to stir at 55-60 °C for 24 h, the disks were thoroughly washed with anhydrous toluene, and dried. Disks were added to a solution of 0.3 % (w/v) Compound 43 in anhydrous toluene and allowed to stir at 55-60 °C for 24 h. The disks were washed with toluene, methanol, and water to remove any unbound SOD mimic prior to implantation. By inductively coupled argon plasma analysis (ICAP, Galbraith Laboratories, Knoxville, TN) of manganese there was 3.0 % catalyst by weight.

To obtain a lower concentration of Compound 43, a solution of 0.7 % (w/v) HMDI in anhydrous toluene (15 h) and a solution of 0.1 % (w/v) Compound 43 in anhydrous toluene (24 h) was used. ICAP analysis of manganese indicated 0.6 % Compound 43 by weight.

009250-000000

EXAMPLE 10
SURFACE COVALENT CONJUGATION OF COMPOUND 43 AND
POLY(ETHYLENE ACRYLIC ACID)

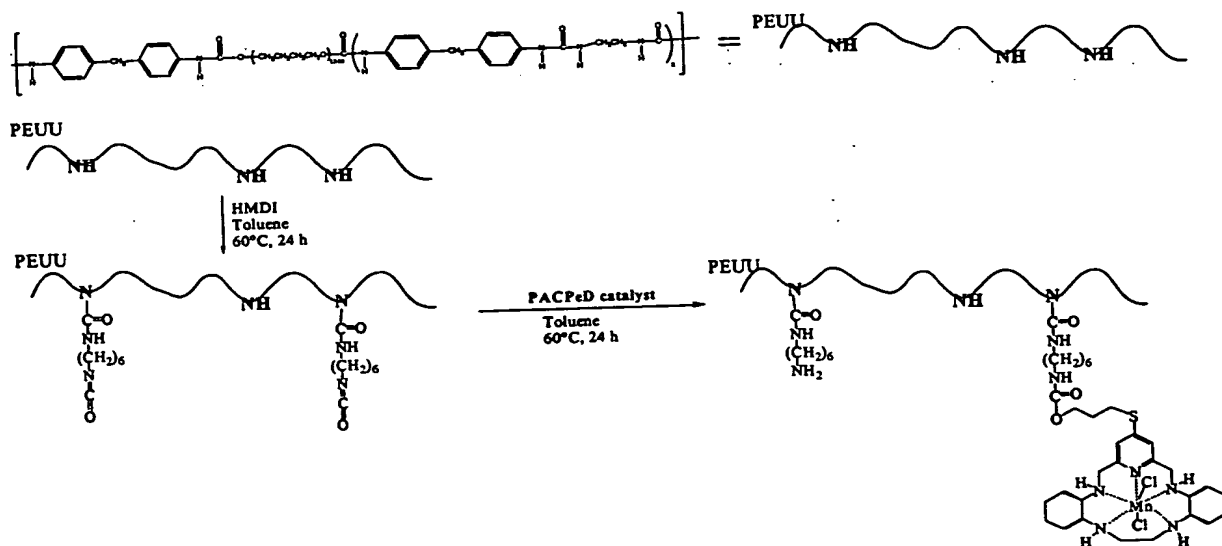
- UHMWPE was melt blended with
- 5 poly(ethylene-co-acrylic acid) in a ratio of 7:3 in a DACA twin screw at 175 °C. Blends were cryoground and melt pressed into films with 5000 psi at 175 °C for 10 minutes. Films were cut into 5 mm diameter disks of ~0.5 mm thickness.
 - 10 PE disks were chlorinated in a solution of 0.2 % (w/v) thionyl chloride in acetonitrile. Pyridine was added to scavenge the HCl formed. The mixture was allowed to stir overnight, the disks were filtered, washed thoroughly with acetonitrile, and dried.
 - 15 Chlorinated disks were added to a solution of 0.1 % (w/v) Compound 43 in acetonitrile, heated to reflux for 4 hours, and allowed to react at room temperature overnight. The disks were filtered and washed with acetonitrile and water. ICAP analysis for manganese



To obtain a lower concentration of Compound 43, the chlorinated disks were added to a solution of 0.02 % (w/v) Compound 43 in DMSO and heated at 60 °C overnight.

- # 2025年12月25日

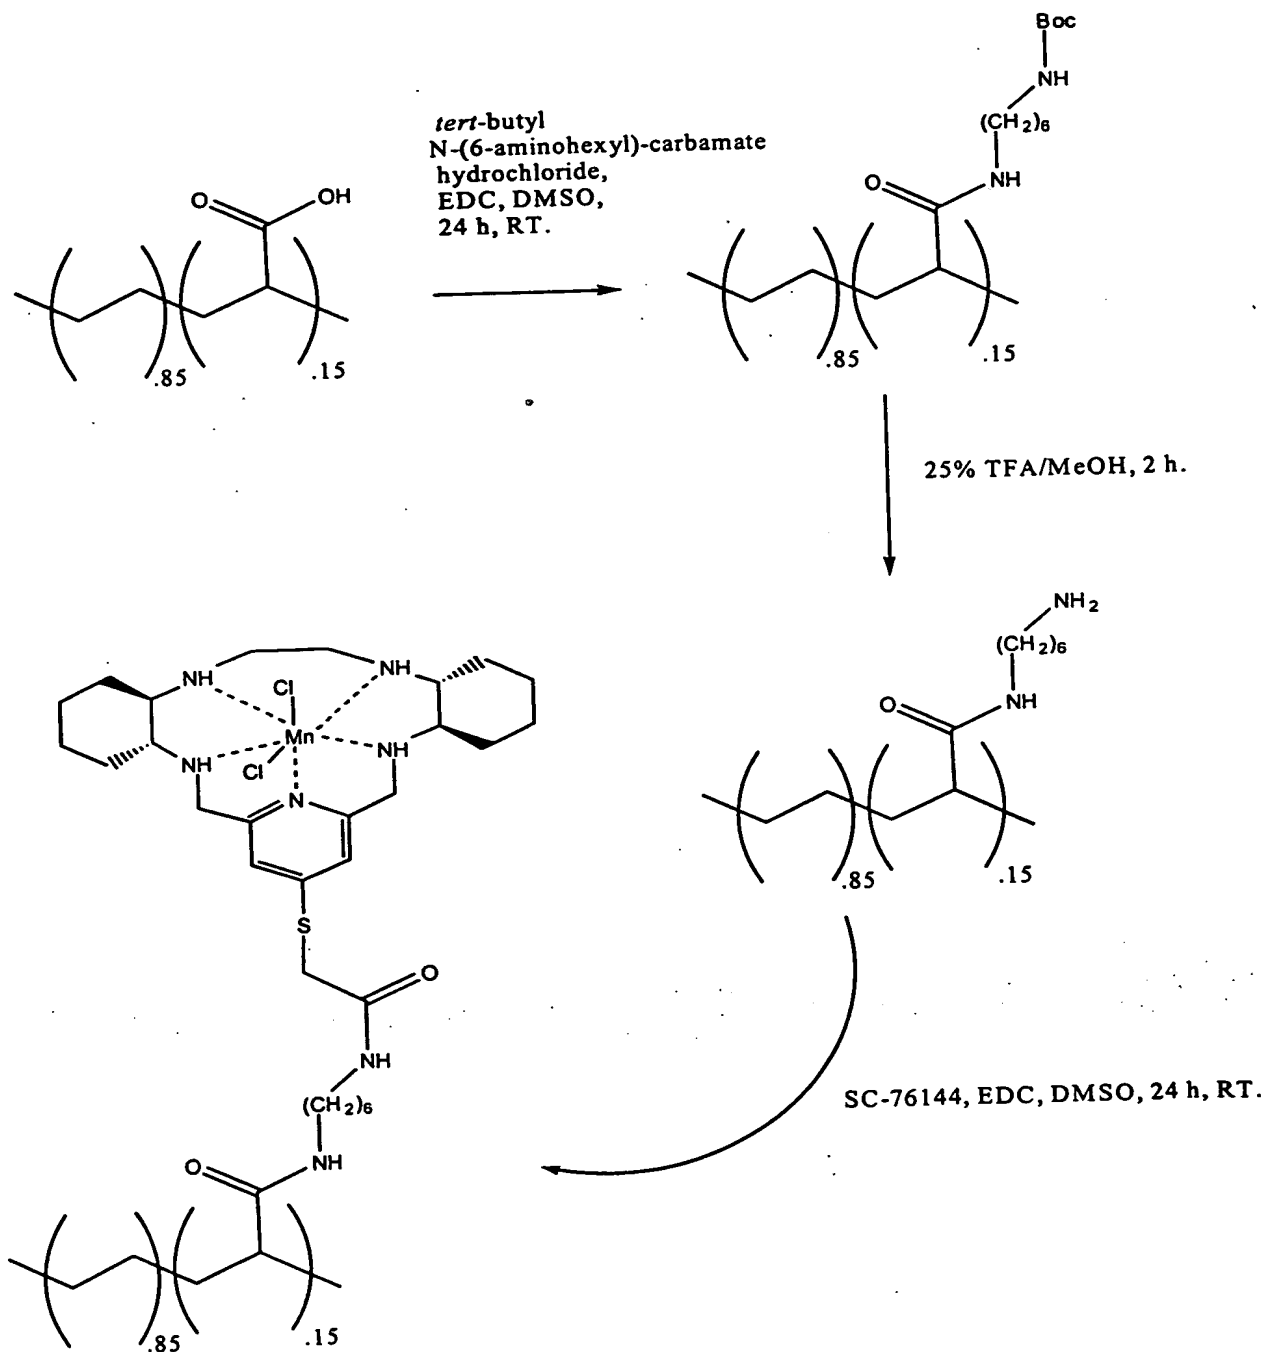The synthesis is diagramed below:



EXAMPLE 11

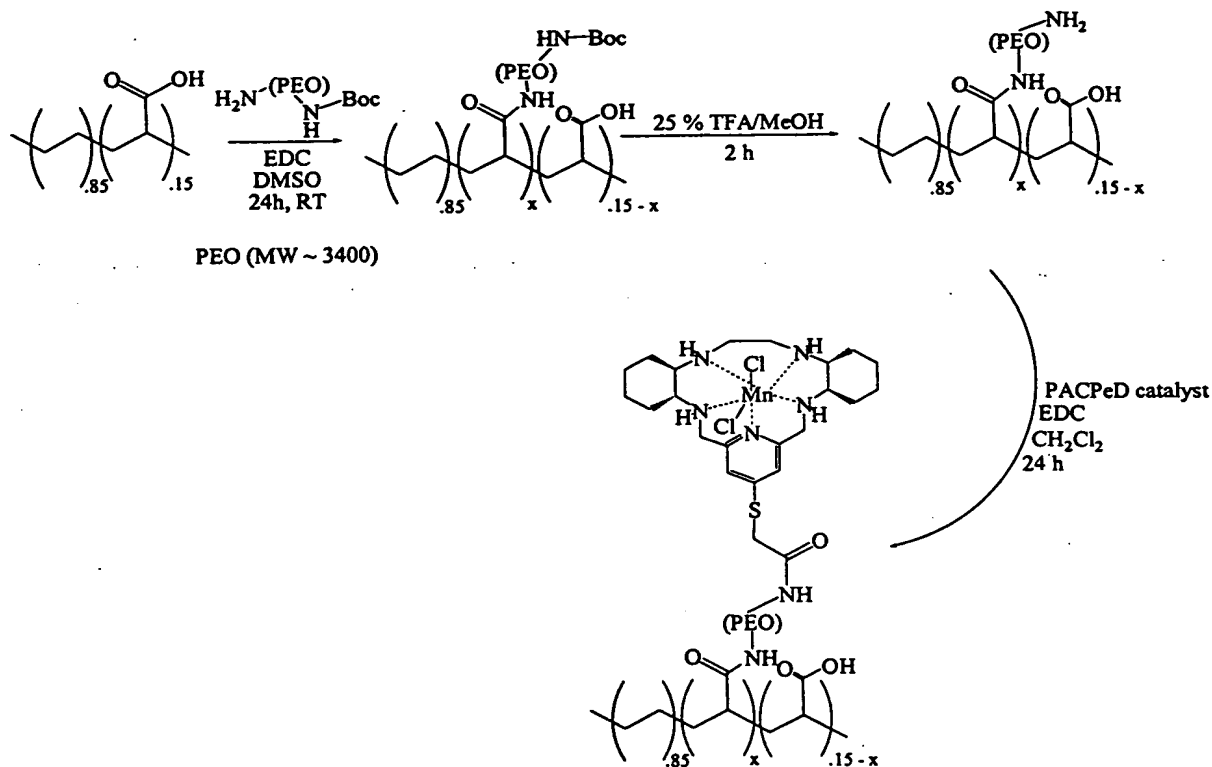
SURFACE COVALENT CONJUGATION OF COMPOUND 52 WITH
POLY(ETHYLENE-CO-ACRYLIC ACID) VIA A PEO LINKER

To a flask under a N₂ purge was added polyethylene-co-polyacrylic acid (0.4 g) (15 % acrylic acid by weight),
5 DMSO (100 mL), and EDC (0.3192 g). The mixture was
allowed to stir for 1 h, then polyoxyethylene bisamine
(amino-PEO) (2.65 g) (Sigma, MW = 3400) was added. The
mixture was allowed to stir overnight. The mixture was
precipitated with water and dried in vacuo yielding 0.37
10 g of white powder. The powder was 1.9 % N by weight as
determined by elemental analysis.

To a flask under a N₂ purge was added EDC (0.0112 g),
Compound 52 (0.031 g), and CH₂Cl₂. The solution was
allowed to stir for 2 h at room temperature and then the
15 amino terminated PEO functionalized polyethylene-co-
polyacrylic acid (0.2 g) was added and the solution was
allowed to stir overnight. Methanol (50 mL) was added to
the solution, the precipitate was filtered off, washed
with methanol and water, and dried in vacuo overnight.
20 By ICAP analysis, 0.26 % of manganese by weight was
present.

05530007 052600

The synthesis is diagramed below:




EXAMPLE 12

SURFACE COVALENT CONJUGATION OF COMPOUND 43 WITH POLY(ETHERURETHANE UREA) COATED TANTALUM

- 5 To a 0.5 % (w/v) PEUU solution in DMAc was added 3-isocyanatopropyl triethoxysilane (3 % w/v) and triethyl amine. The reaction mixture was heated to 55-60 °C for 18 h and then precipitated with ethanol, filtered, and dried. A solution of 1 % (w/v) polymer in DMAc was
- 10 formed. To the oxidized tantalum disks was added polymer

solution and water (50:1, v:v). After agitation for 24 h, the disks were cured at 110 °C for 1 h, rinsed with DMAc, and dried. Half of the disks were set aside for use as controls during implantation. To the PEUU coated disks was added a solution of 5 % (w/v) HMDI in anhydrous toluene and allowed to react at 55-60 °C for 24 h. After washing with anhydrous toluene and drying, a solution of 1 % (w/v) Compound 43 in 1,1-dichloroethane was added and allowed to react for 24 h at 55-60 °C. The disks were then washed with 1,1-dichloroethane, methanol, and water. After drying, ESCA was obtained and indicated a 1.2 % atomic fraction of manganese on the surface.

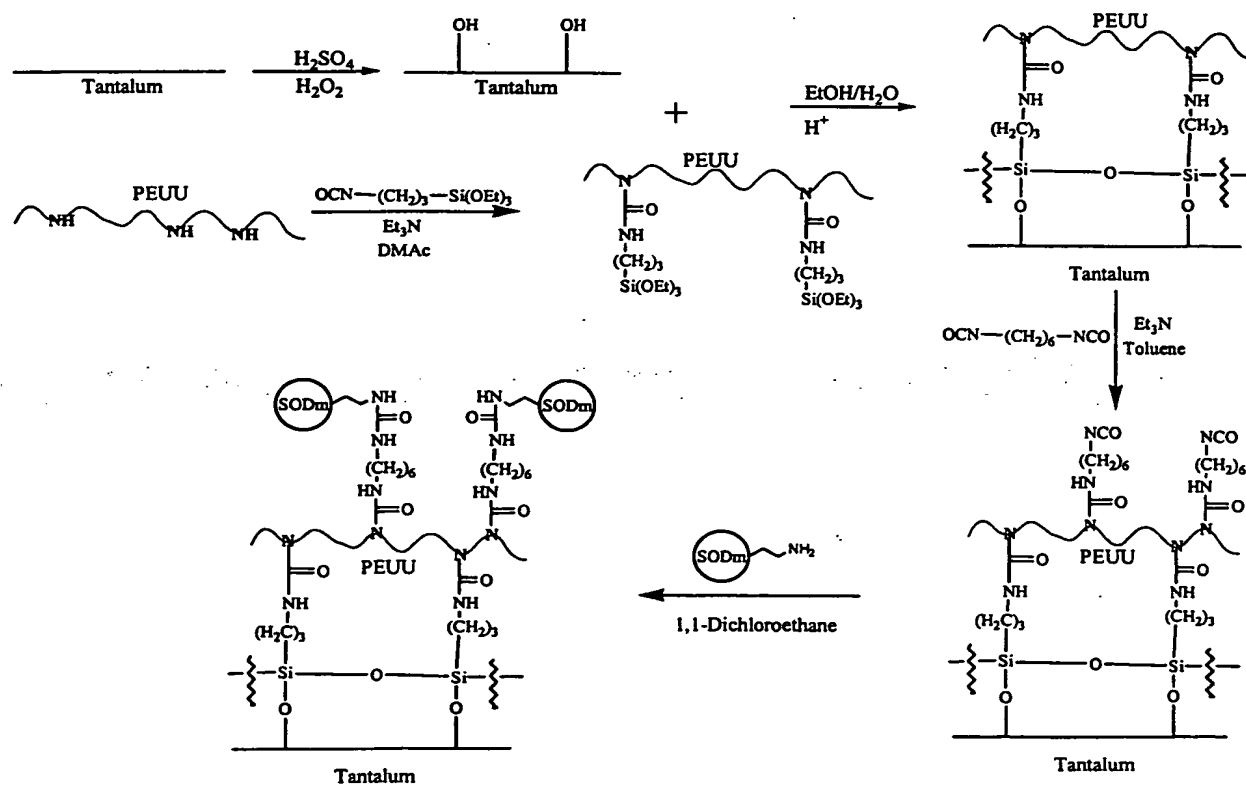The synthesis is diagrammed below:




Disks with a diameter of 6 mm were punched out from 0.25 mm thick tantalum sheets and the edges smoothed.

5 Tantalum disks were initially oxidized using a H_2SO_4 :30 % H_2O_2 (1:1, v:v) solution. 3-isocyanatopropyl triethoxysilane (2 % w/v) was added to an ethanol-water solution (0.8 % water by weight) of pH = 5 (adjusted with acetic acid) and agitated for 5 min. To the oxidized

10 tantalum disks was added the silane and after agitation for 10 min, the disks were quickly rinsed with ethanol, and cured at 110 °C for 1 h. Half of the disks were set aside for use as controls during implantation. To the polysiloxane layered disks was added a solution of 0.5 %

15 (w/v). Compound 43 in DMAc and allowed to react at 60-65 °C for 24 h. After washing with DMAc and drying, one disk was studied by electron scanning for chemical analysis (ESCA), which indicated a 0.5 % atomic fraction of manganese on the surface.

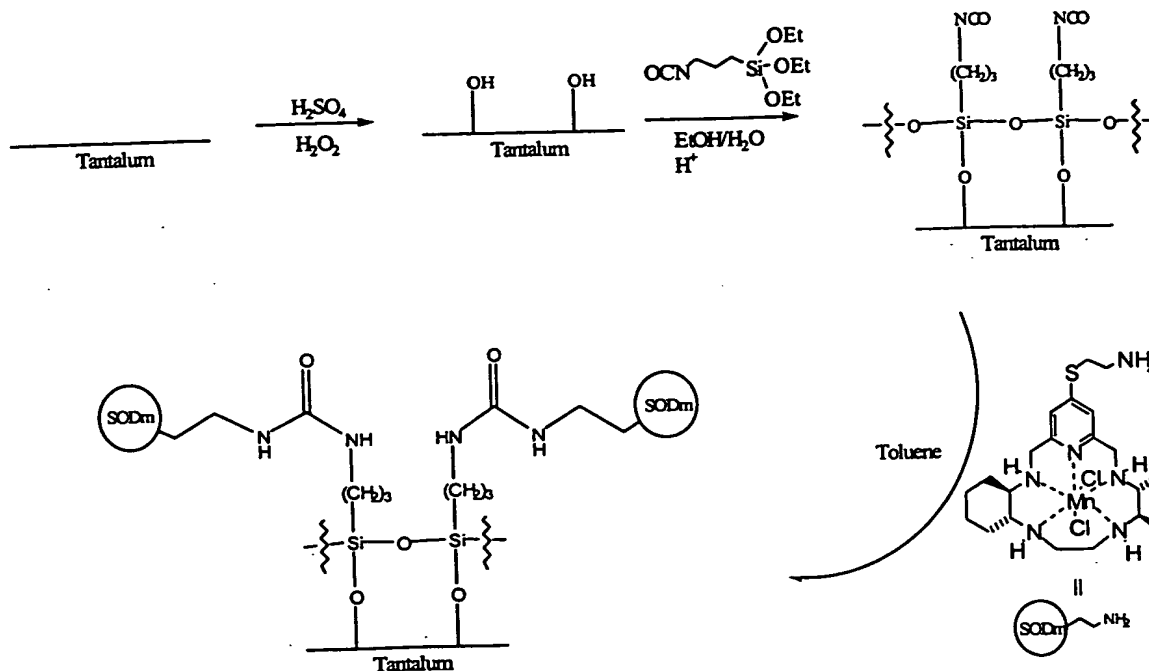The synthesis is diagramed below:



EXAMPLE 14

SURFACE COVALENT CONJUGATION OF COMPOUND 43 WITH COLLAGEN

- 5 To a flask 0.5g of bovine collagen (insoluble, type I from Achilles tendon) was suspended in a 4% solution of 1,4 butanediol diglycidyl ether in a buffer solution. The solution was stirred overnight. The solution was then centrifuged for about 10 minutes, and the supernatant
- 10 was decanted. Any residual, adsorbed diglycidyl ether was removed from the above partially cross-linked collagen by repeated washings with methanol. At this point, the washed collagen was immersed in a solution of Compound 43 (100mg in 50 ml) of the same buffer used in
- 15 the reaction set-forth above. The contents were stirred at ambient temperature in a round bottomed flask

overnight. At the end of this period, the contents were centrifuged and washed as in the earlier step to remove any unreacted Compound 43. The recovered collagen (0.304g) was dried overnight in a vacuum oven at a temperature of 50° C.

ICAP analysis indicated 0.18% Mn in the collagen corresponding to 1.83% binding of Compound 43.


EXAMPLE 15

SURFACE COVALENT CONJUGATION OF COMPOUND 43 WITH HYALURONIC ACID

To a solution of 0.05g of sodium salt of hyaluronic acid (Sigma H53388, Mol.Wt., 1.3×10^6) in 16.7ml distilled water was added 0.070g of Compound 43 and the pH of the solution lowered from 9.3 to 6.8 by careful addition of 0.1M HCl. A solution of 1-(3-Dimethylaminopropyl)-3-ethylcarbodiimide hydrochloride, [EDC.HCl] (0.012g) and 1-Hydroxy-7-azabenzotriazole [HOAT] (0.009g) in dimethylsulfoxide (DMSO)-water (0.5 ml; 1:1, v/v) was added and the pH was adjusted from 5.2 to 6.8 and maintained at 6.8 by incremental additions of 0.1 M sodium hydroxide. The contents were stirred overnight at ambient temperature. After 20 hr, the pH was readjusted to 6.8 from 6.94 and again stirred overnight for a total of 48 hr. At the end of this period, pH of the solution was again adjusted to 7.0 and dialyzed in Pierce Slide-a-dialyzer cassettes (Mol.Wt. cutoff:10,000) against distilled water for 65 hr. Dialyzed contents from the cassettes were syringed out (16.7ml) and 0.8g of NaCl was added to obtain a 5% salt solution. The reaction product was precipitated by the addition of ethanol (x3 to 48 ml). The cotton-like white solid was recovered by filtration, dried under

vacuum overnight. A total of 0.0523g of the isolated product on ICAP analysis showed a 0.21% Mn corresponding to 2.1% binding of Compound 43 to hyaluronic acid.

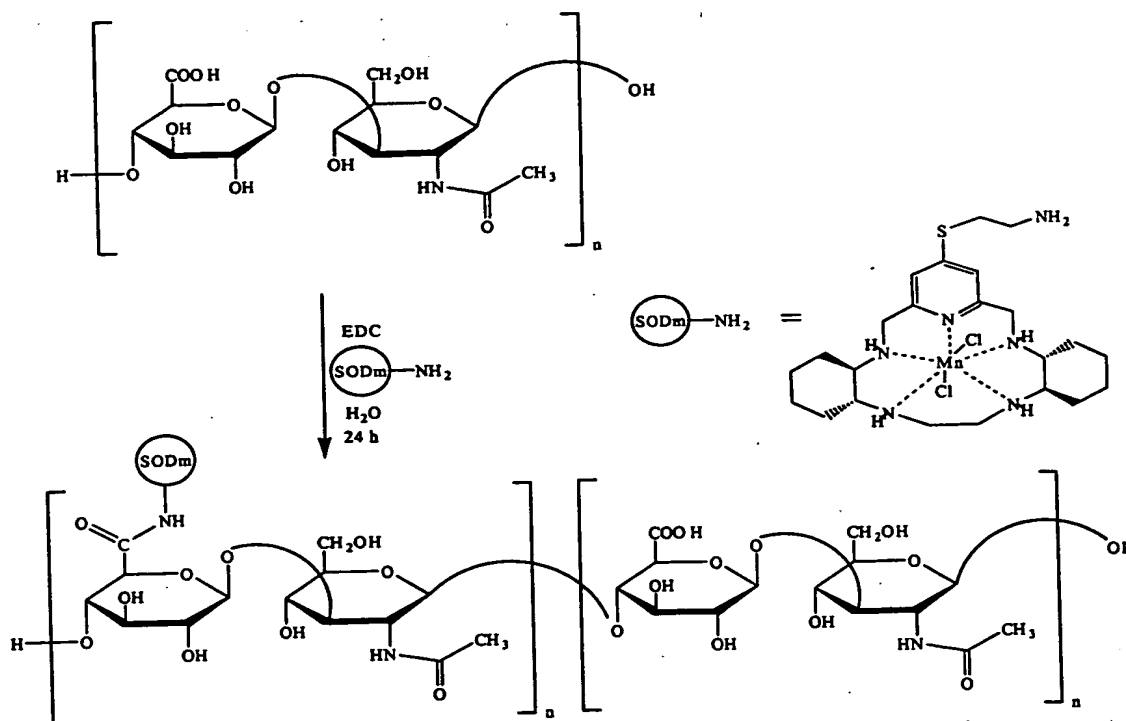The synthesis is diagramed below:




009359 20000550

2023年12月26日

A solution of vacuum distilled 4,4'-methylenebis(phenylene isocyanate) (MDI) is prepared in N, N'-dimethylacetamide (DMA). Polytetramethylene oxide (PTMO), dehydrated under vacuum at 45-50°C for 24 h and stannous octoate catalyst are subsequently added to the stirred MDI solution at room temperature. The concentration of the reactants in solution is about 15% w/v and of the catalyst is 0.4-0.5% by weight of the reactants. After reacting at 60-65°C for 1 h, the mixture is cooled to 30°C. Ethylene diamine (ED) and diamino Compound 16 are then added and the temperature gradually brought back to 60-65°C. This is to prevent an excessively rapid reaction of the highly reactive aliphatic amine groups with isocyanates. The reaction is continued for an additional hour at about 65°C. The entire synthesis is carried out under a continuous purge of dry nitrogen. Molar ratios of MDI, ED, SODm, and PTMO and the molecular weight of PTMO are varied to produce polureaurethanes of varying hardness. The polymers are precipitated in a suitable non-solvent like methanol and dried in a vacuum oven at 70-75°C for about a week. Films for physical testing and implantation in rats are prepared by a conventional spin-casting technique followed by vacuum drying at 70°C for 4 days.

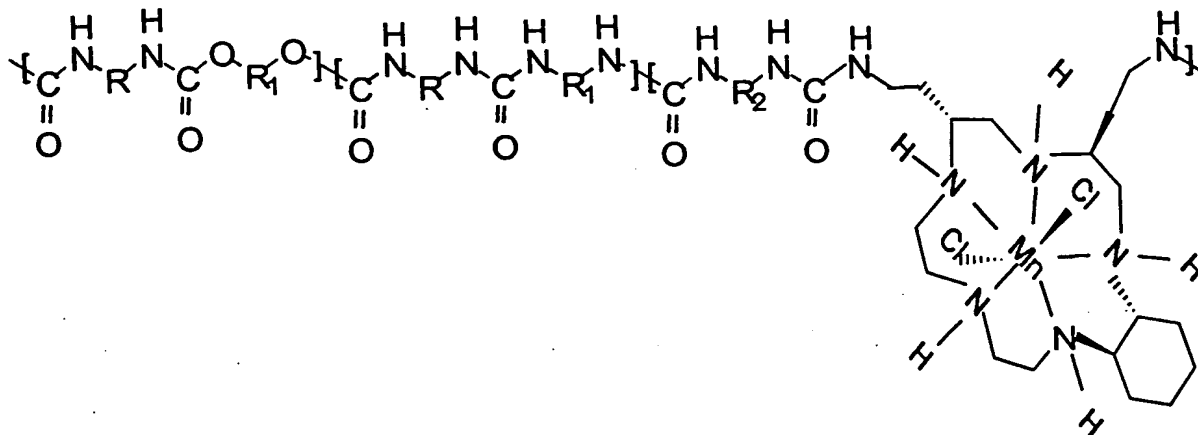The polymer produced by this method is represented diagrammatically below:



EXAMPLE 17

COPOLYMERIZATION OF COMPOUND 53 WITH METHACRYLIC

Synthesis of methacryl functional SODm:

A - 10 percent (w/v) solution of hydroxy (or amino) functional PACPeD in 1,2-dichloroethane is placed in a three necked flask equipped with a stirrer, a dropping funnel and a reflux condenser. To this solution, a -10 percent (w/v) solution of methacryloyl chloride in 1,2 dichloroethane is added dropwise at 0°C followed by pyridine. The mixture is stirred at room temperature for about 16 h. The reaction mixture is filtered to remove pyridine hydrochloride and the filtrate is concentrated under reduced pressure. The residue is dissolved in methanol and the methacryl functional SODm is recovered by column chromatography.

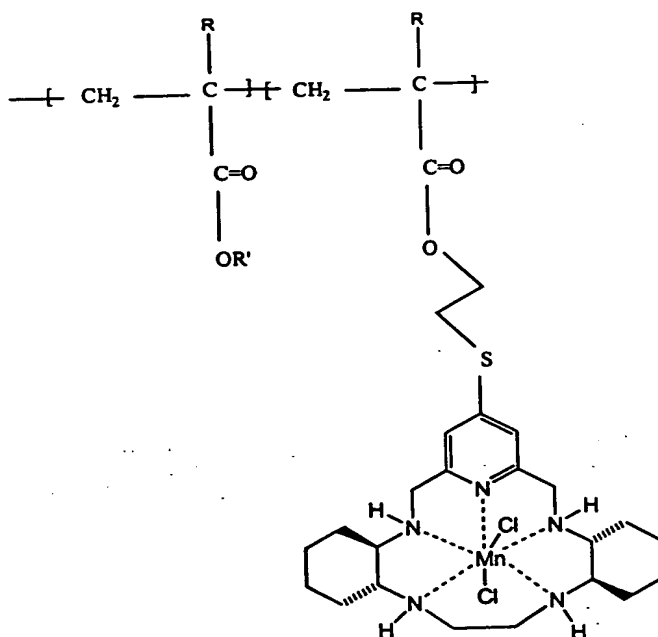
Synthesis of (meth)Acrylic copolymers containing SODm:

Mixtures of freshly distilled methyl methacrylate and Compound 53 are dissolved in toluene (~10%w/v) and

09560007-053600

5

This synthesis results in the following polymer:



EXAMPLE 18
COPOLYMERIZATION OF HEXAMETHYLENE DIAMINE
WITH COMPOUND 16

Synthesis of Poly(hexamethylene -co-SODm sebacamide):

- 5 A mixture of hexamethylene diamine (HMD) and diamino
Compound 16 is dissolved in absolute ethanol and added to
a solution of sebacic acid in absolute ethanol. The
mixing is accompanied by spontaneous warming.
Crystallization soon occurs. After standing overnight,
10 the salt is filtered , washed with cold absolute ethanol
and air dried to constant weight. About 2% excess of HMD
is used to promote a salt rich in diamine. HMD being the
more volatile component, is lost during salt drying or
during polycondensation.
- 15 The dried salt is heated in a suitable reactor with
good stirring first to 2150°C for about an hour and then
to 2700°C. After 30-60 minute heating under atmospheric
pressure, the heating is continued under vacuum for about
an hour. The polymer is then cooled under nitrogen and
20 recovered.

EXAMPLE 19
COPOLYMERIZATION OF COMPOUND 27 WITH TETRAMETHYLENE
GLYCOL
25 AND ISOPHTHALATE

- 30 A three necked flask equipped with a nitrogen inlet
tube extending below the surface of the reaction mixture,
a mechanical stirrer, and an exit tube for nitrogen and
evolved hydrogen chloride is flushed with nitrogen and
charged first with a isophthaloyl chloride followed by a
stoichiometric amount of a mixture of tetramethylene

09560007-052600

glycol and Compound 27 ligand. The heat of reaction would cause the isophthaloyl chloride to melt. The reaction is stirred vigorously and nitrogen is passed through the reaction mixture to drive away the hydrogen chloride (and collected in an external trap). The temperature of the reaction is then raised to 180°C and held at that temperature for 1 hour. During the last 10 minutes of the 180°C heating cycle, the last of the hydrogen chloride is removed by reducing the pressure to 0.5 - 1.0 mm. The copolymer is obtained as a white solid. Compound 27 in the polymer backbone is then complexed with manganese chloride.

EXAMPLE 20

ADMIXTURE OF COMPOUND 38 WITH POLYPROPYLENE

Compound 38 was determined to be thermally stable up to 350°C. 0.105 g of Compound 38 was added to 4.9 g of cryoground polypropylene. The mixture was melted at 250°C and extruded into a strand and a fiber. In this manner, a polypropylene modified with a non-proteinaceous catalyst, 2% by weight, was made. The product strand was cryoground and extracted with pure water. Active Compound 38, as confirmed by both stopped-flow kinetic analysis and HPLC-UV spectroscopy, was extracted from the strand. The concentration of Compound 38 in the water was has been calculated to correspond to approximately a 10% elution of the admixed Compound 38 from the cryoground polymer. This suggests that the polypropylene would release active PACPeD catalyst at the plastic-human body tissue interface where it would serve to reduce inflammation. Other polymers which melt under 300°C and which would be suitable for use in the above process

[illegible]

IN VIVO EVALUATION OF THE INFLAMMATORY RESPONSE TO
5 SEVERAL SURFACE COVALENTLY CONJUGATED POLYMERS AND METAL

Samples of biomaterials, with and without PACPeD catalysts, in the form of 5 - 6 mm discs were implanted subcutaneously on the dorsal surface of female, 250 - 300 gm, Sprague Dawley rats. All disks were sterilized by three brief rinses in 70% alcohol followed by five brief rinses in sterile saline (0.9% NaCl) just prior to implantation. All biomaterials were conjugated with Compound 43. Polyurethane implants were bathed in sterile saline for one hour prior to sterilization in ethanol and implantation. Animals were initially anesthetized with 5% oxygen and 95% carbon dioxide to shave the dorsal region followed by methefane vapor administered through a nose cone during surgery. Following a sterile scrub of the surgical field, a 5 to 6 cm incision through the skin was made along the dorsal midline, a pocket in the interstitial fascia was prepared with a blunt scissors and the implant disks were inserted. The wound was closed with surgical staples. All animals were ambulatory within one hour of anesthesia. For the polyurethane and polyethylene study, each animal received an untreated control and two PACPeD treated disks at a high and low dose. For the tantalum study, each animal received a total of four disks, two controls containing to two types of linkers and two matched PACPeD treated discs. After periods of 3, 7, 14, and 28 days, animals were sacrificed with 100% carbon dioxide and the dorsal skin flap was removed and fixed in 10% neutral buffered formalin. The skin tissue

was pinned upside down for photography of the implants in situ and the individual implants with surrounding tissue were excised and processed in paraffin for light microscopy. PE and PEUU implants were sectioned with the implants embedded in the paraffin block. Tantalum implants were embedded in paraffin and the paraffin block was cut in half with a low speed diamond saw. These halves were then cooled in liquid nitrogen and fractured with a cold razor blade to expose the tantalum disc. The disc was then removed from the block leaving the implant capsule intact. The tissue blocks were remelted and mounted to expose the implant capsule for microtomy. Sections were stained with hematoxylin and eosin and Gomori trichrome (Sigma, St. Louis MO). In addition, sections were stained immunohistochemically to identify monocyte-derived macrophages with a macrophage specific antibody, ED1 (Chemicon Inc., Temecula, CA). The cellular composition of the implant capsule and surrounding tissue and the matrix composition were scored visually. Measurements of foreign body giant cells number and capsule thickness were made by visual inspection and by computer based measurement of digital micrographs. All data were reported as the mean and standard deviation.

25 Results

Conjugated Polyethylene

Histological analysis was performed on triplicate sets of untreated control PE disks and two PACPeD treated PE disks having with either a low (0.06 %) or high (1.1 % (w/w)) level of PACPeD after 3, 7, 14 and 28 days of implantation. These times were selected in order to observe the acute inflammation phase and the progression to a chronic inflammation. Although differences in the

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Index**
 10. **Table of Contents**
 11. **Figure 1**
 12. **Figure 2**
 13. **Figure 3**
 14. **Figure 4**
 15. **Figure 5**
 16. **Figure 6**
 17. **Figure 7**
 18. **Figure 8**
 19. **Figure 9**
 20. **Figure 10**
 21. **Figure 11**
 22. **Figure 12**
 23. **Figure 13**
 24. **Figure 14**
 25. **Figure 15**
 26. **Figure 16**
 27. **Figure 17**
 28. **Figure 18**
 29. **Figure 19**
 30. **Figure 20**
 31. **Figure 21**
 32. **Figure 22**
 33. **Figure 23**
 34. **Figure 24**
 35. **Figure 25**
 36. **Figure 26**
 37. **Figure 27**
 38. **Figure 28**
 39. **Figure 29**
 40. **Figure 30**
 41. **Figure 31**
 42. **Figure 32**
 43. **Figure 33**
 44. **Figure 34**
 45. **Figure 35**
 46. **Figure 36**
 47. **Figure 37**
 48. **Figure 38**
 49. **Figure 39**
 50. **Figure 40**
 51. **Figure 41**
 52. **Figure 42**
 53. **Figure 43**
 54. **Figure 44**
 55. **Figure 45**
 56. **Figure 46**
 57. **Figure 47**
 58. **Figure 48**
 59. **Figure 49**
 60. **Figure 50**
 61. **Figure 51**
 62. **Figure 52**
 63. **Figure 53**
 64. **Figure 54**
 65. **Figure 55**
 66. **Figure 56**
 67. **Figure 57**
 68. **Figure 58**
 69. **Figure 59**
 70. **Figure 60**
 71. **Figure 61**
 72. **Figure 62**
 73. **Figure 63**
 74. **Figure 64**
 75. **Figure 65**
 76. **Figure 66**
 77. **Figure 67**
 78. **Figure 68**
 79. **Figure 69**
 80. **Figure 70**
 81. **Figure 71**
 82. **Figure 72**
 83. **Figure 73**
 84. **Figure 74**
 85. **Figure 75**
 86. **Figure 76**
 87. **Figure 77**
 88. **Figure 78**
 89. **Figure 79**
 90. **Figure 80**
 91. **Figure 81**
 92. **Figure 82**
 93. **Figure 83**
 94. **Figure 84**
 95. **Figure 85**
 96. **Figure 86**
 97. **Figure 87**
 98. **Figure 88**
 99. **Figure 89**
 100. **Figure 90**
 101. **Figure 91**
 102. **Figure 92**
 103. **Figure 93**
 104. **Figure 94**
 105. **Figure 95**
 106. **Figure 96**
 107. **Figure 97**
 108. **Figure 98**
 109. **Figure 99**
 110. **Figure 100**
 111. **Figure 101**
 112. **Figure 102**
 113. **Figure 103**
 114. **Figure 104**
 115. **Figure 105**
 116. **Figure 106**
 117. **Figure 107**
 118. **Figure 108**
 119. **Figure 109**
 120. **Figure 110**
 121. **Figure 111**
 122. **Figure 112**
 123. **Figure 113**
 124. **Figure 114**
 125. **Figure 115**
 126. **Figure 116**
 127. **Figure 117**
 128. **Figure 118**
 129. **Figure 119**
 130. **Figure 120**
 131. **Figure 121**
 132. **Figure 122**
 133. **Figure 123**
 134. **Figure 124**
 135. **Figure 125**
 136. **Figure 126**
 137. **Figure 127**
 138. **Figure 128**
 139. **Figure 129**
 140. **Figure 130**
 141. **Figure 131**
 142. **Figure 132**
 143. **Figure 133**
 144. **Figure 134**
 145. **Figure 135**
 146. **Figure 136**
 147. **Figure 137**
 148. **Figure 138**
 149. **Figure 139**
 150. **Figure 140**
 151. **Figure 141**
 152. **Figure 142**
 153. **Figure 143**
 154. **Figure 144**
 155. **Figure 145**
 156. **Figure 146**
 157. **Figure 147**
 158. **Figure 148**
 159. **Figure 149**
 160. **Figure 150**
 161. **Figure 151**
 162. **Figure 152**
 163. **Figure 153**
 164. **Figure 154**
 165. **Figure 155**
 166. **Figure 156**
 167. **Figure 157**
 168. **Figure 158**
 169. **Figure 159**
 170. **Figure 160**
 171. **Figure 161**
 172. **Figure 162**
 173. **Figure 163**
 174. **Figure 164**
 175. **Figure 165**
 176. **Figure 166**
 177. **Figure 167**
 178. **Figure 168**
 179. **Figure 169**
 180. **Figure 170**
 181. **Figure 171**
 182. **Figure 172**
 183. **Figure 173**
 184. **Figure 174**
 185. **Figure 175**
 186. **Figure 176**
 187. **Figure 177**
 188. **Figure 178**
 189. **Figure 179**
 190. **Figure 180**
 191. **Figure 181**
 192. **Figure 182**
 193. **Figure 183**
 194. **Figure 184**
 195. **Figure 185**
 196. **Figure 186**
 197. **Figure 187**
 198. **Figure 188**
 199. **Figure 189**
 200. **Figure 190**
 201. **Figure 191**
 202. **Figure 192**
 203. **Figure 193**
 204. **Figure 194**
 205. **Figure 195**
 206. **Figure 196**
 207. **Figure 197**
 208. **Figure 198**
 209. **Figure 199**
 210. **Figure 200**
 211. **Figure 201**
 212. **Figure 202**
 213. **Figure 203**
 214. **Figure 204**
 215. **Figure 205**
 216. **Figure 206**
 217. **Figure 207**
 218

After 28 days equally remarkable differences were observed. In the control, foreign body giant cells (FBGCs) formed a layer between the implant and the implant capsule tissue, Figure 6A, to indicate that chronic inflammation was underway. FBGCs also filled the many scratches that formed the rough PE surface. The implant capsule tissue consisted of layered fibroblasts, some ED1 positive macrophages, a few neutrophils and collagen matrix. For the low level PACPeD disks, the capsule had a marked reduction in FBGCs on the surface and in number of cells in the capsule in comparison to control, Figure 6B. With the high PACPeD-PE disks, FBGCs were rarely observed, Figure 6C. The number of FBGCs observed in two independent sections per disk for a total of six counts per treatment group were averaged and revealed a statistically significant decrease in FBGC

2025年12月31日

Histological analysis was performed on triplicate sets of untreated control PEUU disks and two PACPeD treated PE disks having with either a low (0.6 %) or high (3.0 % w/w) level of PACPeD after 3, 7, 14 and 28 days of implantation. Although, PEUU is well known to be less inflammatory than polyethylene, the effect of surface bound PACPeD mimic was obvious and similar to that observed for PE disks at 3 and 28 days. At 3 days, implant capsules of control PEUU disks contained neutrophils and ED1 positive macrophages although their numbers were estimated to be two orders of magnitude less than PE control. Capsules surrounding the low level PACPeD - PEUU implants had a markedly reduced but detectable number of neutrophils with macrophages and fibroblast being predominant. As was observed for the PACPeD-PE implants, capsule tissue around the high dose PACPeD-PEUU disks contained no observable neutrophils and a reduced number of macrophages.

At 28 days, implant capsules around the PEUU control disks had a layer of adherent FBGCs and layers of fibroblasts, ED1 positive macrophages and collagen matrix, Figure 8A. With the low level PACPeD, Figure 8B, the number of FBGCs was reduced although the implant capsule contained fibroblast and fewer ED1 positive macrophages and had a thickness similar to the control. The high level PACPeD-PEUU disk capsule had very few FBGCs and the capsule thickness was estimated to be one half of the control capsule, Figure 8C.

It is well known that PEUU is susceptible to biodegradation *in vivo* leading to the formation of surface pits and cracks. To monitor this effect in control and functionalized disks, scanning electron microscopy, SEM, was used to examine non-implanted disks and 28 day implanted disks, Figures 1-3. The non-implanted PEUU film showed a smooth surface with no cracks or pitted areas, Figure 1. The implanted control PEUU sample after 28 days contained large, multiple cracks and areas where the surface had been eroded, Figure 2. The implanted PACPeD-PEUU sample showed no obvious differences compared to the non-implanted control, Figure 3. Hence, in addition to inhibiting both acute and chronic inflammatory responses, PACPeD linked to PEUU surface inhibited surface degradation observed at 28 days.

Tantalum

Tantalum disks treated with either the silane linker or the PACPeD and silane linker were implanted for 3 and 28 days. The healing response was similar to that seen for treated and untreated polymers. After 3 days, a neutrophil rich granulation tissue enveloped the Ta-silane linker treated disk, figure 9A. With PACPeD treatment, the neutrophils were absent with macrophages and matrix making up the bulk of the implant bed, figure 9B. After 28 days the control disks had a more pronounced implant capsule which was reduced in thickness at PACPeD treated disks, Figure 10.

EXAMPLE 22

IN VIVO EVALUATION OF THE INFLAMMATORY RESPONSE TO
POLYPROPYLENE ADMIXED WITH COMPOUND 54Sample Fiber Preparation

5 The polypropylene implants for the rat studies were made in a fiber form. After a dry blend was made in the cryo-grinder, the mixture was subjected to twin screw mixing in a DACA melt mixer. 3 gms of PP and 60 mg of Compound 54 (more lipophilic than Compound 38) was used.
10 The impact time in the cryogrinder was 5 minutes. The melt mixing chamber was held at 250°C. The mixing time was 5 minutes with the rpm being 50. No appreciable differences in the torque was seen between the control and the Compound 54 incorporated PP.

15 A 50 denier fiber with 30% of elongation to break was the target. The parameters in the DACA melt spin equipment were the following:

	Diameter of the spinneret:	0.5 mm
	Piston speed:	9.82 mm/min
20	Spin speed of the main godet:	1 2.85 RPM
	Draw ratio:	7
	Temperature of the plate:	125°C
	Temperature of the barrel:	250°C

25 The extruded strands from the melt blending were cut into little pieces which fed into the barrel more easily. The melt spinning was done at 250°C. Because the medical grade polymer degrades after 20 minutes at high temperature we had to use a flow rate of 0.35g/min (the amount of PP in the barrel is 7g).

30 Implantation Procedure

05500007-05500000

Polypropylene fibers, with and without Compound 54 mimic, were implanted subdermally in 250 - 300 gram female rats. The polypropylene fiber implant consisted of a 15 to 20 cm length that was wrapped and tied into a figure eight shape measuring about 2 cm by 0.5. Animals were anesthetized with a mixture of 50/10 mg/kg Ketamine/Xylazine by intraperitoneal injection. The right flank was shaved and scrubbed with surgical scrub. A small 1.5 cm long incision was made over the right haunch. A subcutaneous pocket was made and the appropriate piece of material was placed in the pocket. The implants were briefly rinsed in 70% alcohol and rinsed with 2 dips in sterile saline prior to insertion into the tissue pocket. The incision was closed with a stainless steel staple. The rats were returned to their cages for recovery.

The animal were removed from their cages after 21 days post implant and sacrificed by CO₂ inhalation. The implants were removed with overlying skin attached and fixed in Streck STF fixative overnight at 4-8°C. The explants were cut into two or three pieces to expose polymer cross-sections and were processed for embedding in paraffin. Routine sections were cut and stained with hematoxylin and eosin or Masson Trichrome and immunostained with an antibody specific of macrophages, EDI (Chemicon Inc.).

In Vivo Response to Implanted Compound 54 Containing Polypropylene

Gross histology examination of control PP fibers attached to the under surface of the skin flap explants evidenced the fibers to be surrounded by a relatively thick matrix of collagen. The position and overall shape of the implant were discernible but individual fibers

could not be seen. Histological cross-sections confirmed a relatively thick wrap of connective tissue. In addition to matrix, higher magnification views reveal an intense inflammatory reaction at each fiber. Control
5 fibers cover with one to two layers of cells which appear to be macrophages based on positive immunohistochemical staining with the rat macrophage marker, ED1, Figure 4A. In addition, foreign body giant cells were also present on all control fibers. These observations are consistent
10 with the expected chronic inflammatory response.

Compound 54 containing PP fibers exhibited a different response. Gross examination reveal an implant site in which the individual fibers were clearly visible. It was obvious that the fibrotic and cellular response
15 which covered the control PP fibers was reduced. Histologically, a reduced fibrotic response was apparent, with only a thin wrap of matrix being observed in Trichrome stained sections. In addition, the inflammatory response at individual SODm containing
20 fibers was markedly reduced. Typically, modified fibers were covered by a thin layer of matrix and few fibroblasts and only partial coverage by macrophages, Figure 4B. Foreign body giant cells were seldom observed on modified fibers. A count of foreign body giant cells
25 per fiber were performed on control and Compound 54 containing PP fibers. Control fiber FBGC counts were 2.63 ± 1.34 per fiber, $n = 20$ while modified fibers had 1.28 ± 1.04 FBGC per fiber, $n = 40$.

Despite the striking difference in the inflammatory
30 response, the number or density of fine capillaries appeared to be very similar between the control and modified fibers. This was assessed visually in tissue spaces between the fibers within the hank and the tissue surrounding the hank implant.

09560007 052500

EXAMPLE 23
LUMINOL ANALYSIS OF MODIFIED POLYMERS AND METALS
TO DETERMINE
SUPEROXIDE DISMUTATING ACTIVITY

5 The Michelson assay uses xanthine oxidase and hypoxanthine to produce superoxide radical anion in situ in a steady-state manner. If not eliminated from the solution with an antioxidant, superoxide then reacts with luminol to produce a measurable amount of light. This
10 reaction is stoichiometric and provides a linear response under pseudo first-order reaction conditions (i.e. [luminol]>>[O₂⁻]). The light emission is measured over several minutes as the enzyme-substrate solution produces superoxide at a specific rate) and the
15 integration of units over that time is reported. It should then be possible to take samples of antioxidants and determine the presence of catalyst, the rate of dismutation, and/or whether the compound is actually catalytic or stoichiometric in its ability to dismutate
20 superoxide.

Using this method, we have taken sample films¹ (lactide/ glycolide polymer) doped with Compound 38, a known catalyst for the dismutation of superoxide and the parent compound in our current SAR, and analyzed them on
25 a Turner Designs TD-20/20 Luminometer.² 400uL of a 0.05 unit/mL xanthine oxidase, 0.1 mM EDTA and 0.1 mM Luminol in 0.1 M glycine buffer at pH 9; 200uL of a 250 uM

¹Michelson, A.M. In Handbook of Methods for Oxygen Radical Research, Greenwald, R.A., Ed.; CRC:Boca Raton, 1989; p. 74.

²Gary W. Franklin; Monsanto Notebook, p. 6136376, unpublished results.

009350 2009550
xanthine solution are added via autoinjector to a one 2
square millimeter sample of each film in the sample well.
The sample is then run on the Luminometer, and the
reading translated into an integration. Samples of PEUU
5 surface covalently conjugated with Compound 43 were
tested and found to possess superoxide dismutating
activity.

EXAMPLE 24 STOPPED-FLOW KINETIC ANALYSIS

10 Stopped-flow kinetic analysis has been utilized to
determine whether a compound can catalyze the dismutation
of superoxide (Riley, D. P., Rivers, W. J. and Weiss, R.
H., "Stopped-Flow Kinetic Analysis for Monitoring
15 Superoxide Decay in Aqueous Systems," Anal. Biochem, 196:
344-349 1991). For the attainment of consistent and
accurate measurements all reagents were biologically
clean and metal-free. To achieve this, all buffers
(Calbiochem) were biological grade, metal-free buffers
and were handled with utensils which had been washed
20 first with 0.1N HCl, followed by purified water, followed
by a rinse in a 10^{-4} M EDTA bath at pH 8, followed by a
rinse with purified water and dried at 65.degree. C. for
several hours. Dry DMSO solutions of potassium superoxide
(Aldrich) were prepared under a dry, inert atmosphere of
25 argon in a Vacuum Atmospheres dry glovebox using dried
glassware. The DMSO solutions were prepared immediately
before every stopped-flow experiment. A mortar and pestle
were used to grind the yellow solid potassium superoxide
(.about.100 mg). The powder was then ground with a few
30 drops of DMSO and the slurry transferred to a flask
containing an additional 25 ml of DMSO. The resultant
slurry was stirred for 1/2 h and then filtered. This

procedure gave reproducibly .about.2 mM concentrations of superoxide in DMSO. These solutions were transferred to a glovebag under nitrogen in sealed vials prior to loading the syringe under nitrogen. It should be noted that the
5 DMSO/superoxide solutions are extremely sensitive to water, heat, air, and extraneous metals. A fresh, pure solution has a very slight yellowish tint.

Water for buffer solutions was delivered from an in-house deionized water system to a Barnstead Nanopure
10 Ultrapure Series 550 water system and then double distilled, first from alkaline potassium permanganate and then from a dilute EDTA solution. For example, a solution containing 1.0 g of potassium permanganate, 2 liters of water and additional sodium hydroxide necessary to bring
15 the pH to 9.0 were added to a 2-liter flask fitted with a solvent distillation head. This distillation will oxidize any trace of organic compounds in the water. The final distillation was carried out under nitrogen in a 2.5-liter flask containing 1500 ml of water from the
20 first still and 1.0×10^{-6} M EDTA. This step will remove remaining trace metals from the ultrapure water. To prevent EDTA mist from volatilizing over the reflux arm to the still head, the 40-cm vertical arm was packed with glass beads and wrapped with insulation. This system
25 produces deoxygenated water that can be measured to have a conductivity of less than 2.0 nanomhos/cm².

The stopped-flow spectrometer system was designed and manufactured by Kinetic Instruments Inc. (Ann Arbor, Mich.) and was interfaced to a MAC IICX personal
30 computer. The software for the stopped-flow analysis was provided by Kinetics Instrument Inc. and was written in QuickBasic with MacAdios drivers. Typical injector volumes (0.10 ml of buffer and 0.006 ml of DMSO) were calibrated so that a large excess of water over the DMSO

009250 4000055

002250 20000000

solution were mixed together. The actual ratio was approximately 19/1 so that the initial concentration of superoxide in the aqueous solution was in the range 60-120 μM . Since the published extinction coefficient of superoxide in H_2O at 245 nm is .about. $2250\text{M}^{-1}\text{cm}^{-1}$ (1), an initial absorbance value of approximately 0.3-0.5 would be expected for a 2-cm path length cell, and this was observed experimentally. Aqueous solutions to be mixed with the DMSO solution of superoxide were prepared using 80 mM concentrations of the Hepes buffer, pH 8.1 (free acid+Na form). One of the reservoir syringes was filled with 5 ml of the DMSO solution while the other was filled with 5 ml of the aqueous buffer solution. The entire injection block, mixer, and spectrometer cell were immersed in a thermostated circulating water bath with a temperature of $21^\circ\text{C} \pm 0.5^\circ\text{C}$. Prior to initiating data collection for a superoxide decay, a baseline average was obtained by injecting several shots of the buffer and DMSO solutions into the mixing chamber. These shots were averaged and stored as the baseline. The first shots to be collected during a series of runs were with aqueous solutions that did not contain catalyst. This assures that each series of trials were free of contamination capable of generating first-order superoxide decay profiles. If the decays observed for several shots of the buffer solution were second-order, solutions of manganese(II) complexes could be utilized. In general, the potential SOD catalyst was screened over a wide range of concentrations. Since the initial concentration of superoxide upon mixing the DMSO with the aqueous buffer was about $1.2 \times 10^{-4}\text{ M}$, we wanted to use a manganese (II) complex concentration that was at least 20 times less than the substrate superoxide. Consequently, we generally screened compounds for superoxide dismutating

activity using concentrations ranging from 5×10^{-7} to 8×10^{-6} M. Data acquired from the experiment was imported into a suitable math program (e.g., Cricket Graph) so that standard kinetic data analyses could be performed.

5 Catalytic rate constants for dismutation of superoxide by manganese(II) complexes were determined from linear plots of observed rate constants (k_{obs}) versus the concentration of the manganese(II) complexes. k_{obs} values were obtained from linear plots of \ln absorbance at 245 nm versus time

10 for the dismutation of superoxide by the manganese(II) complexes.

EXAMPLE 25

USE OF HYALURONIC ACID ESTERS SURFACE COVALENTLY
CONJUGATED

15 WITH COMPOUND 43 TO PRODUCE A
NEURAL GROWTH GUIDE CHANNEL DEVICE

A guide channel with a composite thread/polymeric matrix structure wherein the thread comprises HYAFF 11 (total benzyl ester of HY, 100% esterified) and the

20 matrix is composed of HYAFF 11p75 (benzyl ester of HY 75% esterified) is obtained by the following procedure.

A. Preparation of Esters

Preparation of the Benzyl Ester of Hyaluronic Acid (HY): 3 g of the potassium salt of HY with a molecular

25 weight of 162,000 are suspended in 200 ml of dimethylsulfoxide; 120 mg of tetrabutylammonium iodide and 2.4 g of benzyl bromide are added. The suspension is kept in agitation for 48 hours at 30° C. The resulting mixture is slowly poured into 1,000 ml of ethyl acetate

30 under constant agitation. A precipitate is formed which is filtered and washed four times with 150 ml of ethyl

acetate and finally vacuum dried for twenty four hours at 30° C. 3.1 g of the benzyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out according to the method described on pages 169-172 of Siggia S. and Hanna J. G. "Quantitative organic Analysis Via Functional Groups," 4th Edition, John Wiley and Sons.

Preparation of the (Partial) Benzyl Ester of Hyaluronic Acid (HY)-75% Esterified Carboxylic Groups,-25 % Salified Carboxylic Groups (Na): 12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000, corresponding to 20 m.Eq. of a monomeric unit, are solubilized in 620 ml of dimethylsulfoxide at 25° C. 120 mg of tetrabutylammonium iodide and 15.0 m.Eq. of benzyl bromide are added and the resulting solution is kept at a temperature of 30° for 12 hours. A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water, 5:1, and three times with acetone, and finally vacuum dried for eight hours at 30° C.

The product is then dissolved in 550 ml of water containing 1% sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water, 5:1, three times with 500 ml of acetone, and finally vacuum dried for 24 hours at 30° C. 7.9 g of the partial propyl ester compound in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R. H. Cundiff and P. C. Markunas Anal. Chem. 33, 1028-1030, (1961).

2025 年 1 月 25 日

A thread of total HYAFP 11 esters, 250 denier, with a minimum tensile strength at break of 1.5 gr/denier and 19% elongation is entwined around an electropolished AISI 316 steel bar with an outer diameter of 1.5 mm, which is the desired inner diameter of the composite guide channel. The woven product is obtained using a machine with 16 loaders per operative part.

The channel made by the above technique is 20 mm long, 300 μ m thick, has an internal diameter of 1.5 mm, and has a weight of 40 mg, equal to 20 mg/cm.

25 USE OF METALS SURFACE COVALENTLY CONJUGATED
WITH COMPOUND 43 TO PRODUCE A
STENT

A stent may be formed from surgical stainless steel alloy wire which is bent into a zigzag pattern, and then wound around a central axis in a helical pattern.

Referring now more particularly to Figures 11-17, there is illustrated in FIG. 11 a midpoint in the construction of the stent which comprises the preferred embodiment of the present invention. FIG. 11 shows a wire bent into an elongated zigzag pattern 5 having a plurality of substantially straight wire sections 9-15 of various lengths separated by a plurality of bends 8. The wire has first and second ends designated as 6 and 7, respectively. Zigzag pattern 5 is preferably formed from a single strand of stainless steel wire having a diameter in the range of 0.005 to 0.025 inch.

FIG. 13 shows a completed stent 30. The construction of the stent is completed by helically winding elongated zigzag pattern 5 about a central axis 31. Zigzag pattern 5 is wound in such a way that a majority of the bends 8 are distributed in a helix along the length of the stent 30. There are preferably about twelve interconnected bends in each revolution of the helix, or six adjacent bends of the zigzag pattern in each revolution. The construction of stent 30 is completed by interconnecting adjacent bends of the helix with a filament 32, preferably a nylon monofilament suture. Filament 32 acts as a limit means to prevent the stent from further radial expansion beyond the tubular shape shown in FIGS. 13 and 14. The tubular shape has a central axis 31, a first end 33 and a second end 35. Each end of stent 30 is defined by a plurality of end bends 36, which are themselves interconnected with a filament 34. Other embodiments of the present invention are contemplated in which the end bends 36 are left unconnected in the finished stent. FIG. 14 shows an end view of stent 30 further revealing its tubular shape. FIG. 15 shows stent 30 of FIG. 13 when radially compressed about central axis 31 such that the straight

05500007-052500

wire sections and the bends are tightly packed around central axis 31.

Referring back to FIG. 11, the zigzag pattern is made up of straight wire sections having various lengths which are distributed in a certain pattern to better facilitate the helical structure of the final stent construction. For instance, in one embodiment, end wire sections 9 could be made to a length of 9 mm followed by two wire sections 11 each being 11 mm in length. Wire sections 11 are followed by two 13 mm wire sections 13, which are in turn followed by two wire sections 15 having a length of 15 mm. Sections 15 are followed by a single wire section 17 having a length of 17 mm. These gradually increasing wire sections at either end of the zigzag pattern enable the final stent to have well defined square ends. In other words, the gradually increasing length wire sections on either end of the zigzag pattern enable the final stent to have a tubular shape in which the ends of the tube are substantially perpendicular to the central axis of the stent. Following wire section 17, there are a plurality of alternating length sections 13 and 15. Short sections 13 being 13 mm in length and long sections 15 being 15 mm in length. This alternating sequence is continued for whatever distance is desired to correspond to the desired length of the final stent. The difference in length between the short sections 13 and long sections 15 is primarily dependent upon the desired slope of the helix (see .beta. in FIG. 16) and the desired number of bends in each revolution of the helix.

FIG. 16 is an enlarged view of a portion of the stent shown in FIG. 13. The body of stent 30 includes a series of alternating short and long sections, 13 and 15 respectively. A bend 8 connects each pair of short and long sections 13 and 15. Each bend 8 defines an angle 2α

0530007 053000

which can be bisected by a bisector 40. These short and long sections are arranged in such a way that bisector 40 is parallel to the central axis 31 of the stent. This allows the stent to be radially compressed without unnecessary distortion.

FIG. 12 shows an enlarged view of one end of the zigzag pattern. End 6 of the wire is bent to form a closed eye portion 20. Eye 20 is preferably kept closed by the application of the small amount of solder to the end 6 of the wire after it has been bent into a small loop. Each of the bends 8 of the zigzag pattern are bent to include a small eye portion designated as 21 and 23 in FIG. 12, respectively. Eye 21 includes a small amount of solder 22 which renders eye 21 closed. Eye 23 includes no solder and is left open. The bends 8 which define the helix can be either in the form of a closed eye, as in eye 21, or open as in eye 23.

After forming the stent, the stent is then modified by surface covalent conjugation with a silyl linker, as in Example 13. By treatment with acid mixtures well known in the art, the stainless steel surface can be oxidized to display a layer of hydroxide. The conjugation then proceeds as in Example 13.

EXAMPLE 27

USE OF SURFACE COVALENTLY CONJUGATED PET FIBERS
TO PRODUCE A WOVEN VASCULAR GRAFT

PET fibers are surface covalently conjugated with Compound 43 according to Example 7. The vascular graft fabric is formed from single ply, 50 denier, 47 filament (1/50/47) pretexturized, high shrinkage (in excess of approximately 15%), polyethylene terephthalate (PET)

RESEARCH in Ball and Beam

The thin walled, woven vascular graft fabric is be
30 formed into a tubular configuration and collapsed into a
reduced profile for percutaneous delivery of the
prosthetic to the delivery site. The implant is
sufficiently resilient so that it will revert back to its
normal, expanded shape upon deployment either naturally

EXAMPLE 28
USE OF COPOLYMERIZED POLYURETHANE TO
TO INSULATE CARDIAC SIMULATOR LEAD WIRE

5 A die-clad composite conductor is made with a highly
conducting core and a cladding layer. Copper and copper
alloys are particularly suitable for the core material of
the composite conductor. Pure copper is preferable, but
alloys such as $\text{Cu}_{0.15}\text{Zr}$, Cu_4Ti , Cu_2Be , $\text{Cu}_{1.7}\text{Be}$, $\text{Cu}_{0.7}\text{Be}$,
10 Cu_{28}Zn , Cu_{37}Zn , Cu_6Sn , Cu_8Sn and Cu_2Fe may be used. A
metal selected from the group consisting of tantalum,
titanium, zirconium, niobium, titanium-base alloys,
platinum, platinum-iridium alloys, platinum-palladium
alloys and platinum-rhodium alloys is applied as a
cladding layer to the conducting core by drawing through
15 a die. The cladding layer thickness is between 0.0025
and 0.035 mm, while the core diameter is between 0.04 and
0.03 mm. Although a single strand conductor could be
used, the risks of breakage are reduced and the
conductivity is increased without going beyond the above
20 described preferred ranges for core diameter and cladding
if a stranded conductor is used. Furthermore a stranded
conductor provides increased flexibility. Thus, it is
preferred that the conductor in the cable be composed of
two or more thinner strands twisted together.

25 The clad wire conductor is enclosed in an elastic
covering tube, which consists of a synthetic elastomer
such as flexible polyurethane. A polyurethane which has
been copolymerized with a PACPeD catalyst, such as the
polyurethane of Example 12, should be used. It is
30 sufficiently elastic and flexible to make possible its
introduction into the heart chamber simply by being
carried along through the blood stream. The
biocompatibility of the clad wire conductor of the cable

is improved by oxidizing the surface of the clad wire and covalently conjugating a PACPeD catalyst to the wire, as in Example 13.

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Notes**
 10. **References**
 11. **Appendix**
 12. **Notes**
 13. **References**
 14. **Appendix**
 15. **Notes**
 16. **References**
 17. **Appendix**
 18. **Notes**
 19. **References**
 20. **Appendix**
 21. **Notes**
 22. **References**
 23. **Appendix**
 24. **Notes**
 25. **References**
 26. **Appendix**
 27. **Notes**
 28. **References**
 29. **Appendix**
 30. **Notes**
 31. **References**
 32. **Appendix**
 33. **Notes**
 34. **References**
 35. **Appendix**
 36. **Notes**
 37. **References**
 38. **Appendix**
 39. **Notes**
 40. **References**
 41. **Appendix**
 42. **Notes**
 43. **References**
 44. **Appendix**
 45. **Notes**
 46. **References**
 47. **Appendix**
 48. **Notes**
 49. **References**
 50. **Appendix**
 51. **Notes**
 52. **References**
 53. **Appendix**
 54. **Notes**
 55. **References**
 56. **Appendix**
 57. **Notes**
 58. **References**
 59. **Appendix**
 60. **Notes**
 61. **References**
 62. **Appendix**
 63. **Notes**
 64. **References**
 65. **Appendix**
 66. **Notes**
 67. **References**
 68. **Appendix**
 69. **Notes**
 70. **References**
 71. **Appendix**
 72. **Notes**
 73. **References**
 74. **Appendix**
 75. **Notes**
 76. **References**
 77. **Appendix**
 78. **Notes**
 79. **References**
 80. **Appendix**
 81. **Notes**
 82. **References**
 83. **Appendix**
 84. **Notes**
 85. **References**
 86. **Appendix**
 87. **Notes**
 88. **References**
 89. **Appendix**
 90. **Notes**
 91. **References**
 92. **Appendix**
 93. **Notes**
 94. **References**
 95. **Appendix**
 96. **Notes**
 97. **References**
 98. **Appendix**
 99. **Notes**
 100. **References**